ABUS 16/32 channel
hybrid digital video recorder
TVVR60011 / TVVR60021

User manual

Version 1.0

English

These user manual contains important information for installation and operation.

This should be also noted when this product is passed on to a third party.

Therefore look after these operating instructions for future reference!

A list of contents with the corresponding page number can be found in the index.

See **System operation** on page 70.

Pay attention to the information in the separate quick guide, plus the notes on the CD and in the accompanying documentation on “Web server control” and “Clients Software”. These can be found on the Internet under www.abus.com.

Device overview

Front

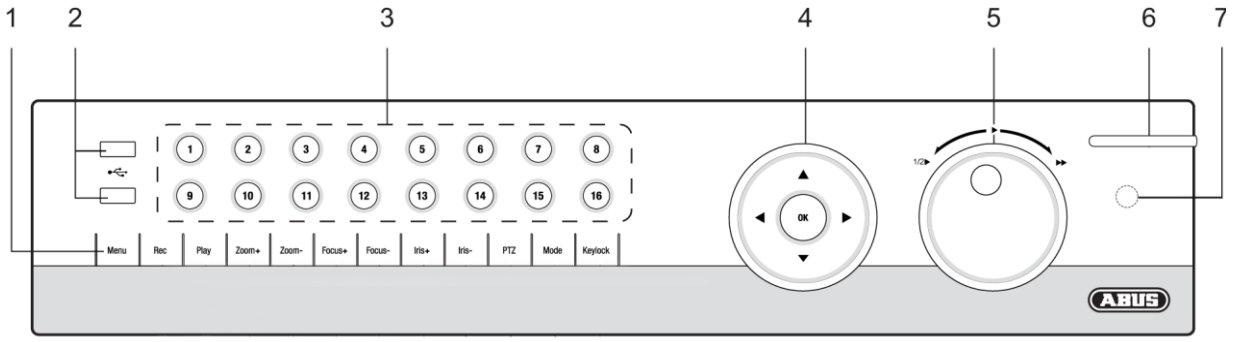

Rearside

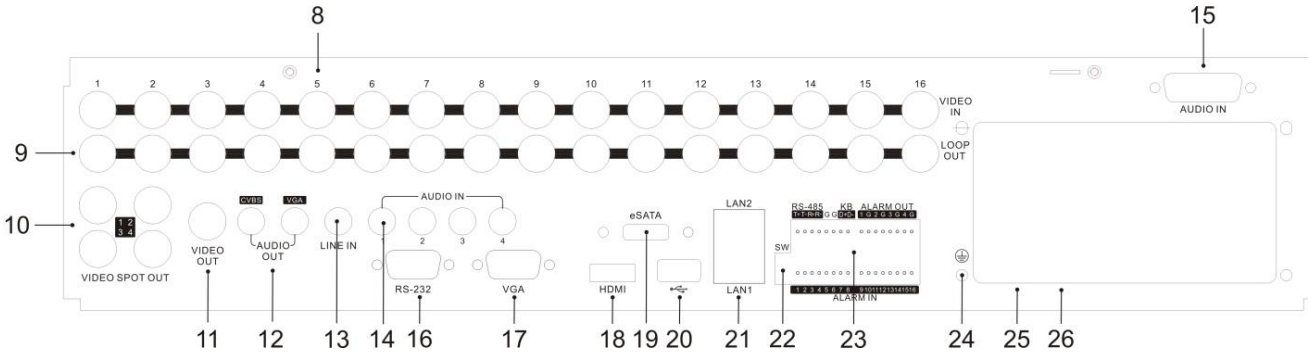

System operation

General information

The device can be controlled as follows:

- Using the operating elements on the front of the device
- Using the remote control
- Using the USB mouse

Operating elements on the device

Note

Pay attention to the overview on page 69.

No.	Name Function
1	**Recorder operating keys:** **MENU:** • Calls up the main menu • Switches the key tones on and off (press and hold down for 5 seconds) **REC:** • Calls up the menu for manual recording **PLAY:** • Opens the playback menu **ZOOM+**: • Zooms in on the image section in PTZ mode **ZOOM-**: • Zooms out of the image section in PTZ mode • Switches the video output in live mode: Monitor – Spot Monitor or Video Out – Video Spot Out **FOCUS+**: • Sets the focus in PTZ mode **FOCUS-**: • Sets the focus in PTZ mode **IRIS+**: • Opens the iris **IRIS-**: • Closes the iris in PTZ mode **PTZ:** • Activates the PTZ control **MODE:** • Switches the screen view **KEYLOCK:** • Locks the control keys
2	**USB ports:** For external USB 2.0 devices (e.g. mouse, external disk drive or DVR burner)
3	**Camera selection keys (1, 2, 3...):** Displays the camera status: • White: Camera is connected • Blue: Connected camera is recording • Not lit: No camera connected In the live view: • Selects the camera and displays the full-screen view
4	**Directional keypad:** During playback: • ▲, ▼ Sets the speed • ◀, ▶ Previous / next day In the live view: • Selects the channel In menus: • Navigation **OK key:** • Press and hold for 5 seconds to switch the device on and off • Confirms the selection • Ticks / unticks the boxes During playback: • PLAY/PAUSE Increased/ decreased playback speed: • Normal playback speed
5	**Jog Shuttle:** During playback: • Outer ring (shuttle ring) change playback speed • Inner ring to play single frames in single mode In menus: • Inner ring moves the cursor upwards / downwards • Outer ring moves the cursor left / right In the live view: • Selects the channel
6	**DVR status LED:** Displays the device status: • White (constantly lit): System status is OK • White (flashing): System status is OK, recording settings are stored, surveillance mode is active • Blue (constantly lit): At least one camera is currently recording • Red (constantly lit): System maintenance required
7	**IR receiver:** For the remote control

Connections on the rear of the device

Note

Pay attention to the overview on page 69.

No.	Name Function
8	**Video IN:** BNC video inputs for analog cameras (1–8 or 1–16 respectively)
9	**Video LOOP OUT:** looped video outputs
10	**VIDEO SPOT OUT:** video spot outputs, configured using the recorder menu
11	**VIDEO OUT:** BNC video output for connecting a monitor
12	**AUDIO OUT:** audio outputs (RCA)
13	**LINE IN:** audio input (line, RCA)
14	**AUDIO IN (RCA):** audio inputs 1–4
15	**AUDIO IN (DB26):** TVVR60011: audio inputs 5–8 TVVR60021: audio inputs 5–16
16	**RS-232 port:** serial port – not functional
17	**VGA port:** VGA monitor port
18	**HDMI port:** HDMI monitor port
19	**eSATA port:** connection for an external hard drive
20	**USB port:** additional USB connection
21	**LAN1 & LAN2:** 2 x RJ45 ports (for the network connection)
22	**DIP switch:** DIP switch for end-of-line resistor RS-485 connection
23	**RS-485, ALARM IN, ALARM OUT:** RS-485 port for PTZ cameras, max. 16 alarm inputs, max. 4 relay outputs
24	**Ground (GND):** ground connection
25	**Power supply:** connection for cold device cable, 100–240 V AC, 50–60 Hz
26	**Power ON/OFF:** on and off device switch

Remote control (TVAC40930)

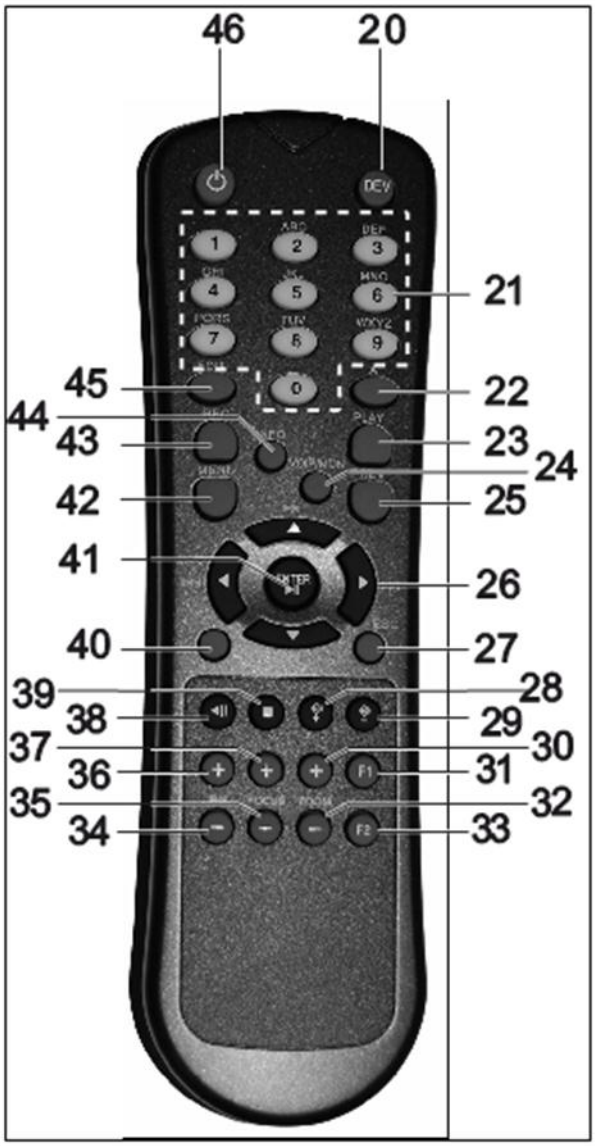

Operating elements on the remote control

Note

Pay attention to the remote control diagram on page 67.

No.	Name Function
20	**DEV:** Assigns the remote control with the device ID
21	**Alphanumeric keys:** • Selects the camera (channel) in the live view • Entry of letters and digits in system fields
22	**A:** Changes the entry format (upper / lower case, symbols, digits)
23	**PLAY:** Starts playback
24	**VOIP:** • Not used
25	**PREV:** Changes the screen display in the live view
26	**Navigation keys:** During playback: • ▲, ▼ Sets the speed • ◀, ▶ Previous / next day In the live view: • Selects the camera (channel selection) In menus: • Navigation
27	**ESC:** • Not used

No.	Name Function
28	Not used
29	Not used
30	**Zoom +:** Zooms in on the image section in PTZ mode
31	**F1:** In lists: • Selects all available options
32	**Zoom -:** Zooms out of the image section in PTZ mode
33	**F2:** Switches between tabs
34	**IRIS-:** In PTZ mode: • Closes the iris
35	**Focus-:** In PTZ mode: • Brings the image section into focus
36	**IRIS+**: In PTZ mode: • Opens the iris
37	**Focus+**: In PTZ mode: • Brings the image section into focus
38	**◀II**: Pause / reverse playback
39	■: Stops playback
40	**PTZ:** Switches on PTZ control
41	**Enter ▶II:** • Confirms the selection • Ticks / unticks the boxes During playback: • PLAY/PAUSE Single play mode: • Advances by a single frame
42	**MENU:** • Calls up the main menu • Switches the key tones on and off (press and hold down for 5 seconds)
43	**REC:** Opens / starts manual recording
44	**INFO:** • Switches to another monitor in the live view
45	**EDIT:** General use: • Activates the text entry; backspace in text fields
46	**⏻ POWER:** Switches on/off (hold down for 5 seconds)

Mouse operation

Note

Further descriptions in these operating instructions are made with the mouse.

The device is suitable for use with a USB mouse. Connect the mouse to the USB port.

Button	Function
Left	**Single-click:** • Selection in menu, activation of an entry field or tab **Double-click:** • Switches between the screen display of single and multiple images in the live view and during playback **Click and drag:** • In PTZ mode: Camera control • Set-up of alarm areas or zones
Right	**Single-click:** • Calls up the pop-up menu
Scroll wheel	**In the live view:** • Shows previous / next camera **In menus:** • Scrolls through the menus

Device overview **69**

System operation **70**
General information 70
Operating elements on the device 70
Connections on the rear of the device 71
Operating elements on the remote control 73
Mouse operation 73

Quick guide **77**
Before you start 77
Installing the HDD 77
Establishing the connections 77
Configuring the device 77

Important safety information **78**
Explanation of symbols 78
Proper use 78
General information 78
Power supply 78
Overloading / overvoltage 79
Cables 79
Installation location / operating environment 79
Remote control 79
Care and maintenance 80
Accessories 80
Putting into operation 80
Children and the device 80

Introduction **81**
General information 81
Unpacking the device 81
Scope of delivery 81
On-screen keyboard 82
Starting the device 82
Switching off, locking and rebooting the device 82

Status displays **83**
General information 83
DVR status LED 83
Camera selection keys – status LED 83
Displays on the monitor 83

Setup wizard **84**
Setting up the system 84
Setting up the administrator 84
Time / Date 84
Network Settings 85
HDD Management 85
Setting up network cameras 85
Camera recording 86

Live view **87**
Overview 87
Status symbols 87
Pop-up menu for mouse operation 87

Selection bar in the camera image 88
Settings 89
Setting the camera output 89
Playback 90
General information 90
Playback screen 90
Using the control panel 90
Right click when playback is running 91
Main menu 92
Menu overview 92
Menu description 92
Menu description 93
Settings 94
Overview 94
General 94
Terms and definitions 95
Network layout 96
Network-configuration 96
Live view 103
Warning 103
User 103
Camera 105
OSD 105
Image 106
PTZ 106
Motion 106
Handling 106
Private zone 108
Tamper surveillance 108
Video signal loss 108
Setting up 109
Schedule 109
Encoding 110
Confirm the settings by clicking Apply and leave the menu with Back. 111
Advanced settings 111
Holidays 111
HDDs 112
Installing the HDD 112
HDD Management parameters 112
HDD settings of the cameras 113
Hard disc setting 113
Checking the HDD status 114
Setting up the HDD alarm 114
S.M.A.R.T 114
Continous Recording 115
Event 115
Marking 115
Image 115
Maintenance 117
System Info 117
Log Search 117
Import / Export 118
Upgrade 118

Default....119
Network....119
Video Export....121
Duration....121
Event (event type ‘Alarm input’)....122
Event (event type ‘Motion’)....122
Manual Management....123
Record....123
Continous Capture....123
Alarm....123
Shutdown....123
Troubleshooting....124
Device cleaning and care....124
Note....124
Technical data....125
Disposal....126
Information on the EU directive on waste electrical and electronic equipment....126
Information on handling batteries....126
Important information on disposing of batteries....126
Information on the European RoHS directive....126
Glossary....127
Overview of specialist terms....127
Internal HDD....129

Quick guide

Before you start

The following preparatory steps must be made:

1. Pay attention to the general information, safety information and notes on setting up and connecting the device (see page 70).
2. Check the contents of the package for completeness and damages.
3. Insert the batteries into the remote control.

Note

Pay attention to the information in the separate quick guide.

Installing the HDD

Warning

Switch off the device and disconnect it from the mains power supply.
Pay attention to the required earthing of the device to avoid static discharge.

1. Install one or more HDDs (see the separate quick guide).
2. Firstly, establish the connection to the motherboard using the red data cable (small connector).
3. Connect the power supply cable (large 5-pin connector).
4. Check that the connections are secure.
5. Close the housing.

Note

Only use HDD's that are approved for video recording and 24/7 usage.

Establishing the connections

Note

Pay attention to the minimum radius when laying cables. Do not kink the cable.

1. Connect all network cameras with your network
2. Connect the audio connections.
3. Connect the sensors to the alarm inputs.
4. Connect the monitor to the HDMI/VGA or BNC connection.
5. Connect the mouse to the USB port.
6. Establish a connection to the mains power supply.
7. Switch on the device using the POWER switch on the rear. The DVR status display on the front of the device lights up.

Configuring the device

Note

Pay attention to the information in the separate quick guide.

- Proceed through the individual steps in the setup wizard (see page 96).
- The following settings are configured in sequence:
  - Language selection for the user interface
  - Administrator setup
  - General settings (date, time etc.)
  - HDD management (initialisation etc.)
  - Network settings
  - Camera management

Note

Subsequent changes to the date and time can lead to the loss of data!

Note

Check the ABUS homepage (www.abus.com) if for this device any firmware updates are available and install these

Important safety information

Explanation of symbols

The following symbols are used in this manual and on the device:

Symbol	Signal word	Meaning
	Warning	Indicates a risk of injury or health hazards.
	Warning	Indicates a risk of injury or health hazards caused by electrical voltage.
	Important	Indicates possible damage to the device/accessories.
	Note	Indicates important information.

The following labels are used in the text:

	Meaning
1. … 2. …	Set of tasks or instructions with a defined sequence in the text
• … • …	Set of points or warnings without a defined sequence in the text

Proper use

Only use the device for the purpose which it was designed and built for. Any other use is considered inappropriate.

This device may only be used for the following purpose(s):

- This DVR recorder is used in combination with connected video signal sources (network cameras) and video output devices (CRT or TFT monitors) for object surveillance.

Note

Data storage is subject to national data-protection guidelines.

During installation, inform your customers regarding the existence of these guidelines.

General information

Before using the device for the first time, read the following instructions carefully and pay attention to all warnings, even if you are already familiar with electronic devices.

Warning

All guarantee claims become invalid for damages caused by non-compliance with these operating instructions.

We cannot be held liable for resulting damages.

Warning

We cannot be held liable in the event of material or personal damage caused by improper operation or non-compliance with the safety information.

All guarantee claims are invalid in such cases.

Keep this manual in a safe place for future reference.

If you pass on or sell the device, you must also include this user manual.

This device has been manufactured in accordance with international safety standards.

Power supply

- Only operate this device through a power source which supplies the mains power specified on the type plate.
- If you are unsure of the power supply at the installation location, contact your power supply company.

Warning

Avoid data loss!
Always use an uninterruptible power supply (UPS) with overvoltage protection.

- Disconnect the device from the mains power supply before carrying out maintenance or installation work.
- The on/off switch does not completely disconnect the device from the mains power supply.
- To disconnect the device completely from the mains power supply, the plug must be disconnected from the mains socket. Therefore, the device should be positioned so that direct and unobstructed access to the mains socket is guaranteed at all times and the plug can be disconnected immediately in an emergency.

To avoid the possibility of fires, the plug should always be disconnected from the network socket if the device is not used for long periods. Disconnect the device from the mains power supply before impending electrical storms, or use an uninterruptible power supply.

Warning

Never open the device on your own! There is a risk of electric shocks!
If it is necessary to open the device, consult trained personnel or your local maintenance specialist.

- The installation or modification of a HDD should only be made by trained personnel or your local maintenance specialist.

Warning

The installation of additional equipment or modification of the device invalidates your guarantee if not carried out by trained personnel.
We recommend having the HDD installed by a maintenance specialist.
Your guarantee is invalidated in the event of improper installation of the HDD.

Overloading / overvoltage

- Avoid overloading of mains sockets, extension cables and adapters as this can result in fires or electric shocks.
- Use overvoltage protection to prevent damages caused by overvoltage (e.g. electrical storms).

Cables

- Always hold cables by the connector, and do not pull the cable itself.
- Never touch the mains cable with wet hands, as this can lead to a short circuit or electric shock.
- Never position the device, furniture or other heavy items on the cable. Ensure that the cable does not become kinked, especially on the connector and sockets.
- Never knot the cable, and do not tie it to other cables.
- All cables should be laid so that they cannot be stepped on or cause an obstruction.
- A damaged mains cable can cause a fire or electric shock. Check the mains cable from time to time.
- Never modify or manipulate the mains cable or plug.
- Do not use plug adapters or extension cables that do not conform to the applicable safety standards, and do not make alterations to power supply cables or mains cables.

Installation location / operating environment

- Position the device on a firm, level surface and do not place any heavy objects on the device.
- The device is not designed for operation in rooms subject to high temperatures or moisture (e.g. bathrooms), or in excessively dusty rooms.
- Operating temperature and ambient humidity:
  -10 °C to 55 °C, maximum 85% relative humidity. The device may only be operated in moderate climate conditions.

Ensure the following:

- Sufficient ventilation must be present at all times (do not place the device in a storage rack, on thick carpets, on a bed or anywhere where the ventilation slots are covered. Make sure that a gap of at least 10 cm is present on all sides).
- The device must not be exposed to direct heat sources (e.g. heaters).
- The device must not be exposed to direct sunlight or strong artificial light.
- The device must not be placed in close proximity to magnetic fields (e.g. loudspeakers).
- Naked flames (e.g. candles) must not be placed on or near the device.
- Contact with spraying or dripping water and aggressive liquids must be avoided.
- The device must not be operated in close proximity to water, and must not be submerged under any circumstances (do not place objects containing water on or near the device, such as vases or drinks).
- Foreign objects must not penetrate the device.
- The device must not be exposed to strong variations in temperature, as this can lead to condensation and electrical short circuits.
- The device must not be exposed to excessive jolts or vibrations.

Remote control

- Remove all batteries if the device will not be used for a sustained period, as these can leak and damage the device.

Care and maintenance

Maintenance is necessary if the device has been damaged. This includes damage to the plug, mains cable and housing, penetration of the interior by liquids or foreign objects, exposure to rain or moisture or when the device does not work properly or has fallen.

- Disconnect the device from the mains power supply before maintenance (e.g. cleaning).
- If smoke develops or unusual noises or odours are detected, then switch off the device immediately and pull the mains plug from the socket. In such cases, the device should not be used until it has been inspected by a qualified technician.
- Maintenance work should only be carried out by qualified specialists.
- Never open the housing on the device or accessories. There is a risk of fatal injury due to an electric shock when the housing is opened.
- Clean the device housing and remote control with a damp cloth.
- Do not use solvents, white spirit or thinners as these can damage the surface of the device.
- Do not use any of the following substances:
- Salt water, insecticides, solvents containing chlorine or acids (ammonium chloride) or scouring powder.
- Gently rub the surface with a cotton cloth until it is completely dry.

Warning

The device works under dangerous voltages. The device must only be opened by authorised specialists. All maintenance and service work must be carried out by authorised firms. Improper repairs can expose device users to the risk of fatal injury.

Accessories

- Only connect devices that are suitable for the intended purpose. Otherwise, hazardous situations or damage to the device can occur.

Putting into operation

- Observe all safety and operating instructions before putting the device into operation for the first time.
- Only open the housing to install the HDD.

Warning

When installing the device in an existing video surveillance system, ensure that all devices are disconnected from the mains power supply and low-voltage circuit.

Warning

If in doubt, have a specialist technician carry out assembly, installation and connection of the device.

Improper or unprofessional work on the mains power supply or domestic installation puts both you and other persons at risk.

Connect the installations so that the mains power circuit and low-voltage circuit always run separately from each other. They should not be connected at any point or become connected as a result of a malfunction.

Children and the device

- Do not allow children access to electrical devices. Never allow children to use electrical devices without supervision. Children may not be able to accurately detect possible risks. Small parts can be life-threatening if swallowed.
- Keep batteries away from small children. Call for medical assistance immediately if a battery is swallowed.
- Keep packaging materials away from children (danger of suffocation).
- This device should not be used by children. If used improperly, spring-loaded parts can be ejected and cause injuries to children (e.g. eye injuries).

Introduction

Dear customers,

Thank you for purchasing this product.

This product complies with current domestic and European regulations. Conformity has been proven, and all related certifications are available from the manufacturer.

To maintain this status and to guarantee safe operation, it is your obligation to observe these operating instructions!

Read the entire operating manual carefully before putting the product into operation and pay attention to all operating and safety information!

All company names and product descriptions are trademarks of the corresponding owner. All rights reserved.

In the event of questions, please contact your local maintenance specialist or dealer.

Disclaimer

These operating instructions have been produced with the greatest care. Should you discover any missing information or inaccuracies, please contact us under the address shown on the back of the manual. ABUS Security-Center GmbH does not accept any liability for technical and typographical errors, and reserves the right to make changes to the product and operating instructions at any time and without prior warning. ABUS Security-Center GmbH is not liable or responsible for direct or indirect damages resulting from the equipment, performance and use of this product. No forms of guarantee are accepted for the contents of this document.

General information

In order to use the device correctly, read this user manual carefully and keep it in a safe place for later use.

This manual contains instructions on recorder operation and maintenance. Consult an authorised specialist if the device needs to be repaired.

Unpacking the device

Handle the device with extreme care when unpacking it.

The packaging is made of reusable materials, and should always be passed on for recycling.

We recommend the following:

Paper, plastic packaging, cardboard and corrugated cardboard should be disposed of in the appropriate recycling containers.

If recycling containers are not available in your local area, then you can dispose of these materials as domestic waste.

If the original packaging has been damaged, inspect the device. If the device shows signs of damage, then return it in the original packaging and contact the manufacturer.

Scope of delivery

- ABUS 16/32 channel hybrid DVR
- Mains cable
- SATA cable and screws for HDD
- Bracket and screws for server racks
- Software CD
- User manual (On CD or enclosed)
- Quickguide (On CD or enclosed)
- Terminal connectors

On-screen keyboard

The on-screen keyboard appears after clicking on a text entry field with the mouse:

The following screen keyboard appears during mere numerical entry:

The keys have the same function as on a computer keyboard.

- To enter the character, left-click the mouse.
- To finish data entry, press **Enter**.
- To delete the character in front of the cursor, click on ⬅.
- To switch between upper and lower case, click on the framed **a** symbol. The current setting is displayed above the keyboard.
- To cancel the entry or exit the field, press **ESC**.

Starting the device

Important

The device must only be operated with the mains power specified on the type plate.

For safety reasons, use an uninterruptible power supply (UPS).

After the device has been connected to the power supply and the main switch on the rear of the device is switched on, the DVR status LED lights up.

1. The device carries out a self-test during the start-up procedure.
2. The setup wizard appears. Exit the wizard to access the live view.

Switching off, locking and rebooting the device

Click on “ShutDown” in the main menu. The overview appears.

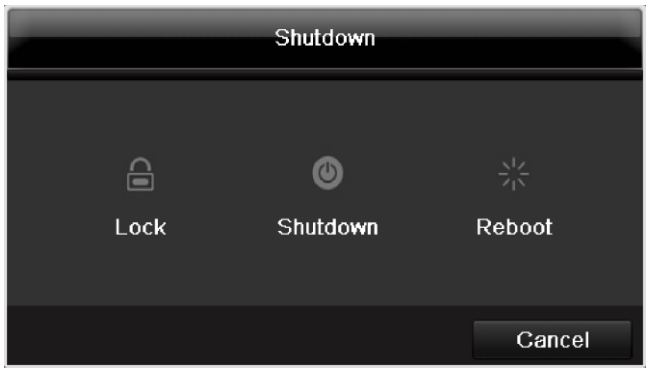

1. To switch off the device, select **ShutDown** and confirm by pressing **Yes**. The device is then switched off.
   - Do not press any keys during the shutdown procedure.
2. To lock the system, select the corresponding **Lock** symbol on the left. The user interface is now locked and a password must be entered to access the menu.
3. To reboot the device, select the corresponding **Reboot** symbol on the right. The device is then rebooted.

Switching on the device

- Press and hold the **OK** key for 5 seconds to switch the device back on.

Status displays

General information

The following status displays indicate the current operating state:

- LEDs on the front of the device
- Acoustic signal tones
- Icons (display elements) on the monitor

Note

Pay attention to the information in the separate quick guide.

DVR status LED

State	Function
White (constantly lit):	System status is OK
White (flashing):	System status is OK, recording settings are stored, surveillance mode is active
Blue (constantly lit):	At least one camera is currently recording
Red (constantly lit):	System maintenance required

Camera selection keys – status LED

State	Function
Off:	No camera connected
White (constantly lit):	Camera is connected
Blue (constantly lit):	Camera is currently recording

Displays on the monitor

The device shows the date and time, camera name and whether a recording is in progress.

- Continuous recording: Blue “R”
- Alarm recording: Red “R”
- Motion recording: Yellow “R”

Setup wizard

Setting up the system

The setup wizard guides you through the necessary basic system settings. The DVR is then set up for recording and surveillance.

Note

All detailed settings can be found in the device menu (see overview on 92).

The language selection appears after switching on for the first time:

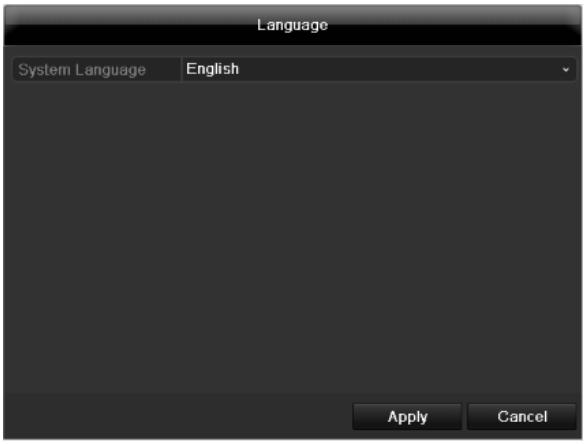

1. Click the entry field and select the desired language from the list. Click on **Apply** to continue. The following query appears:

- Click on **Next** to start the wizard.

Note

After the system is set up, you can untick the box. The setup wizard is then no longer started automatically.

Setting up the administrator

Warning

Note down the admin password.
The following password is preset

“1 2 3 4 5”

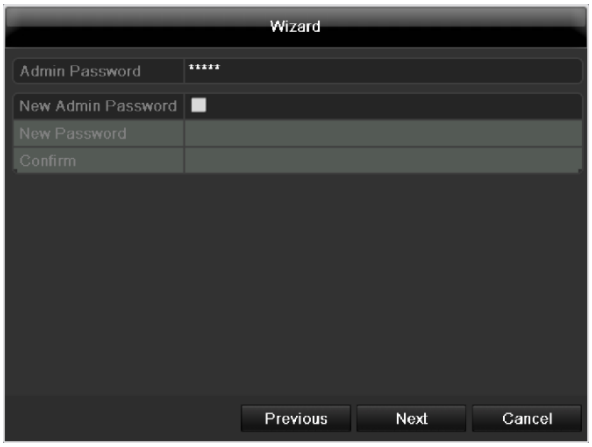

1. Click the entry field and enter your admin password.
2. To assign a new password, tick the box next to **New Admin Password**.
3. Enter the new password and confirm in the field below.
4. Click on **Next**.

Time / Date

Enter the system time (date and time). Click on **Next** to accept the data.

Network Settings

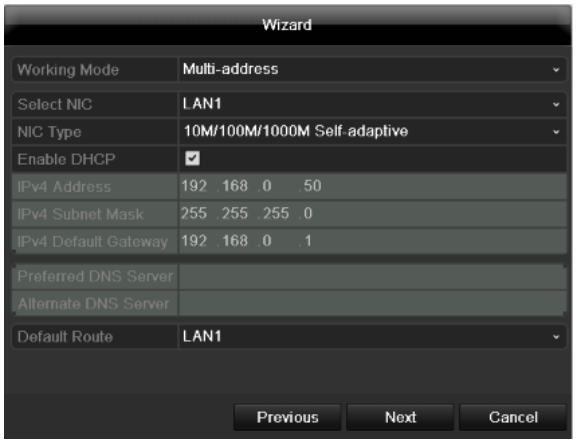

Note

To check whether DHCP can be selected (or if you have to set the IP address and other settings manually), consult your network administrator.

1. **DHCP activated:** If DHCP is set up in the network router, then tick the DHCP box. All network settings are then made automatically.
2. **DHCP not activated:** Enter the data manually (IPv4 address, IPv4 subnet mask and IPv4default gateway = IPv4 address of the router). You can also optionally enter the address of the DNS server that you need for sending the E-mail.

   A typical address specification is as follows:

   - IPv4 address: 192.168.0.50
   - IPv4 Subnet mask: 255.255.255.0
   - IPv4 Default gateway: 192.168.0.1
   - Preferred DNS server: 192.168.0.1

Note

When the device is accessed remotely via the internet, it should be given a fixed network address.

HDD Management

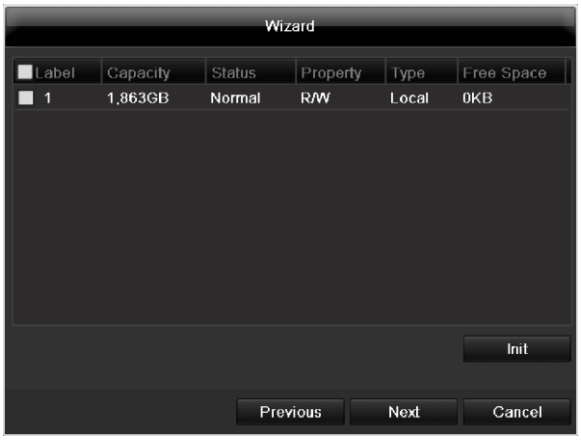

1. To set up a new hard disc, activate the “Check box” with a left click and then click on **Init.**

Warning

All data on the drive is deleted!

2. Confirm the prompt by pressing **OK**. The HDD is then set up for operation. The progress is displayed on the status bar.
3. Exit the setting by pressing **Next**.

Setting up network cameras

1. To setup network cameras, click on **Search**.
2. You can find an overview of all the network cameras found below.
3. Activate the “Checkbox” with a left-click to select the network camera and then click on Add.
4. Click on **Next**

Camera recording

1. At “Camera” select a camera with which you would like to record.
2. Activate the check box “Start recording”.
3. Select the type of recording. You can choose between “Time plan” and “Motion recognition”.
   Arm the motion detection inside the camera for recording motion.
4. Press **Copy** to take on the setting for other cameras. For this, select the cameras that appear in the new window. Activate the respective check box with a mouse click.
5. Finalize the setting and end the installation assistant with **OK**.

Live view

Overview

The live view starts automatically after the device is switched on.

You can also go back to the live view by pressing the **Menu** key repeatedly.

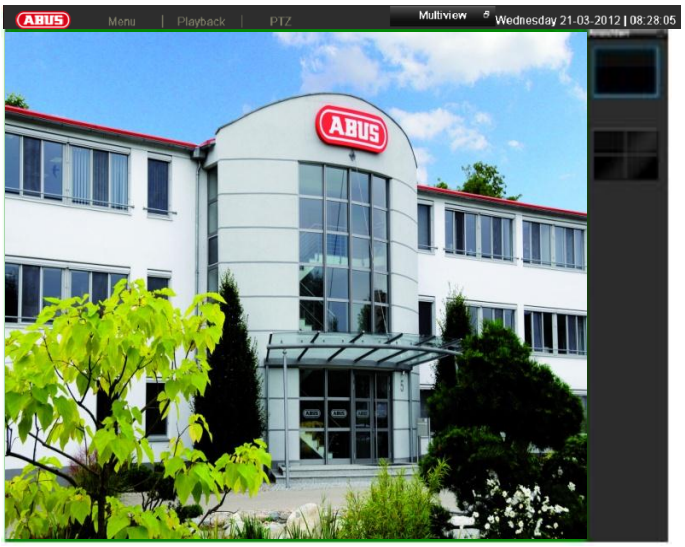

The following menus are found in the screen header:

- Menu
- Playback
- PTZ

The view pop-up menu is found on the right. The time and date are displayed on the right.

- To open the view pop-up menu, click on the rectangular symbol at the top-right of the menu bar.
- Click on one of the symbols to switch between the different views.

The signals of the connected cameras are displayed on the main screen.

- By double-clicking the left mouse key, you can display the camera image as a full-screen view or switch back to the original view.

Status symbols

- The following symbols are displayed depending on the operating status of the device:

Symbol	Meaning
R	Red: Event Recording • Event recording
R	Yellow: Motion Recording • Recording at motion detection
R	Blue: Recording • Continuous recording

Pop-up menu for mouse operation

Note

Press the right mouse button when the cursor is positioned on a live image.

The following settings can be made. The arrow pointing to the right indicates that a sub-menu is opened for selection:

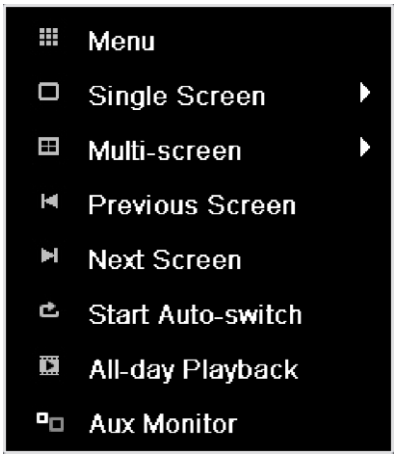

Menu	Opens the main menu
Single Screen	Full-screen view for selected camera
Multi Screen	Various camera layouts
Previous Screen	Changing the presentation of the previous camera
Next Screen	Displays the next camera(s)
Start Auto-Switch	Starts the camera sequence
All-day Playback	Switches to playback mode
Output mode	Renders the image softer or sharper
Aux Monitor	to spot monitor

Note

Stop Auto-switch:

Specify the delay in the image sequence in the display settings.

Note

Activation of “AUX monitor” without a connected spot monitor:

Mouse pointer function is deactivated.

Selection bar in the camera image

Click on the camera image in single or multi view. A selection bar appears:

(1) (2) (3) (4) (5) (6) (7) (8)

Nr.	Meaning of symbol
(1)	Area to move the miniature bar
(2)	Activate / deactivate manual recording
(3)	Immediate playback of the last 5 minutes
(4)	Activate / deactivate audio output of video output
(5)	Immediate image of selected channel
(6)	PTZ-control
(7)	digital zoom
(8)	Leaving the selection bar

Settings

Note

The live view can be set as follows.

Open the main menu, then click on “Configuration”. Then click on “Liveview”:

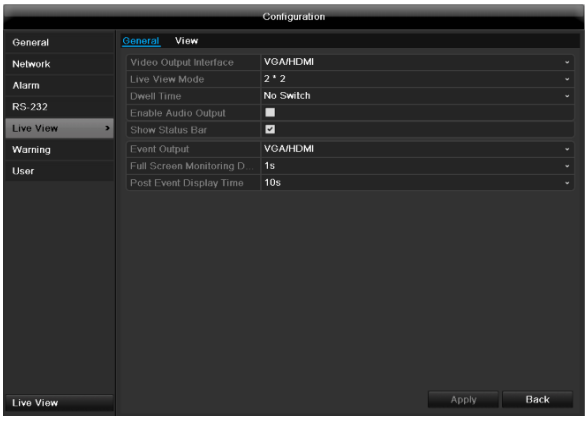

The following settings are available in the TAB “General”:

Video Output Interface	VGA/HDMI, Main CVBS, Spot monitor Select the connection where the settings are changed
Live View Mode	Different camera layouts
Dwell Time	Switching time between the individual cameras and the sequence display
Enable Audio Output	Activate/deactivate audio output of the video output The audio signal is only given if the corresponding camera input is presented as a full screen.
Event Output	Allocate monitor for the output of events
Full Screen Monitoring Duration	in seconds, where the event on the allocated monitor will be displayed.
Post Event Display Time	in seconds, the duration of the Pop-up window when an event occurs.

Note

The recorder image can either be shown on an HDMI or a VGA monitor. The combination of HDMI and VGA output is supported.

The BNC output can be used either for a spot monitor or a separate monitor.

Note

VGA monitor connected:
A connected HDMI/VGA monitor automatically becomes the main monitor where the audio output is also assigned. The BNC output Video Spot Out output displays the cameras in sequence and in full screen.

If during the boot process of the DVR the HDMI/ VGA cable is not connected, the main video signal is displayed at BNC output MAIN. Connect the HDMI/VGA cable and reboot the DVR in order to display the main video signal at the VGA output.

No HDMI/VGA monitor connected:
The main video signal is displayed at BNC output MAIN. The BNC output Video Spot Out output displays the cameras in sequence and in full screen.

Setting the camera output

You can have a maximum of 8 or 16 cameras respectively (TVVR60011/TVVR60021) displayed in the live cast at the same time.

1. Click on the TAB “View”.

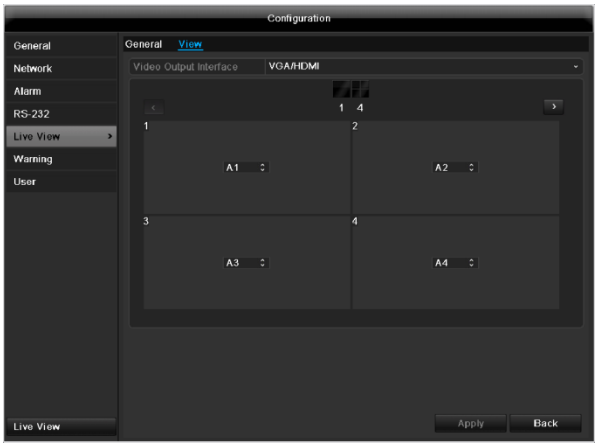

2. Select the display mode.
   - 1 x 1
   - 2 x 2
   - 3 x 3
   - 1 + 5
   - 1 + 7
   - 4 x 4
3. The camera signal is assigned to the corresponding image section using the navigation keys.
   - “X” means that this camera is not displayed.
4. Click on **Apply** to accept the settings.

Playback

General information

Playback can be made in three different ways:

- Through the video search in the main menu
- From the live view
- Through the log file in the maintenance menu

Note

The buttons “previous file/day/event” are used differently depending on the playback mode:

Normal playback:
By pressing the button the playback jumps to the previous/next day.

Video Search:
By pressing the button the playback jumps to the previous/next event day.

Video Export:
By pressing the button the playback jumps to the previous/next file.

Note

It is possible to start a simultaneous playback with up to 4/8 cameras.

Playback screen

Playback is controlled on the control panel:

No.	Area
❶	Running playback with date and time
❷	Used to select the camera for feedback
❸	Calendar with recording type
❹	Control panel with time bar (see right)

Using the control panel

The control panel (4) is used for controlling the running playback. The symbols have the following meaning:

(1)

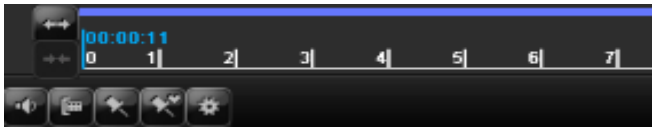

(2) (3) (4) (5) (6)

(16)

(7) (8) (9) (10) (11) (12) (13) (14) (15)

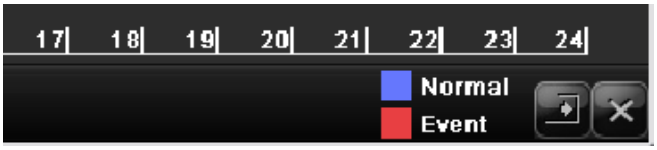

(17) (18) (19)

No.	Meaning / function
1	Zoom in / Zoom out the time line (24/12/1 hours)
2	Audio playback switch on/ off
3	Define start point / end point of a video for securing data
4	Add marking
5	Add user-defined marking
6	Administer marking
7	Activates the digital zoom. One section of the overview area can be marked for enlargement.
8	Smart search (section search): Mark a section in the video image being played back which should be checked for motion (alternatively, click on full screen detection). The results will be displayed in the time scale, and are marked in green.
9	Backwards playback
10	Stop
11	Playback start / pause
12	Jump backward 30 seconds
13	Jump forward 30 seconds
14	Slow forward (slow motion) (1/16x - 1x)
15	Fast forward (1x - 16x)
16	Previous recording, previous day
17	Next file/day/event
18	Time bar: • Click on the time bar with the mouse to continue playback from another point • To start playback from a specific time, click on

	the slider and drag it to the required time
19	Recording type Blue = Continuous recording Red = Event recording
20	Hides the control panel
21	Exits playback

Note

You can zoom in on the screen image.

- Right-click in the running playback.
- Please choose 'Digital Zoom'.
- The zoom mode is active. Shift the zoom area by means of the window in the miniature screen.
- Right-click the image to finish.

Please klick on ‚Tag management' (6):

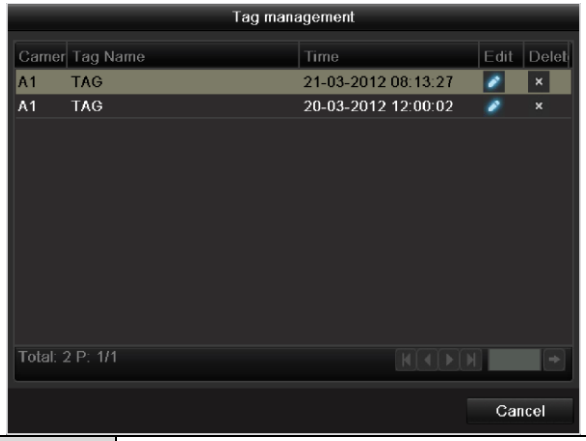

Control Panel	Fades in/out the control field for playback control
Exit	Ends playback

- In order to change the description of your marking, click on the process symbol. To remove, click on the delete symbol.

Right click when playback is running

Perform a right click on the playback image. The following options are available:

Camera	Camera to be set
Digital Zoom	Enlarges the selected screen section digitally

Main menu

Menu overview

The following overview shows the main menus used to set and control the device.

Furthermore you can find important information regarding the devide on the right side of the menu.

- Click on the menu to open it.
- Click **Exit** to close the menu overview.

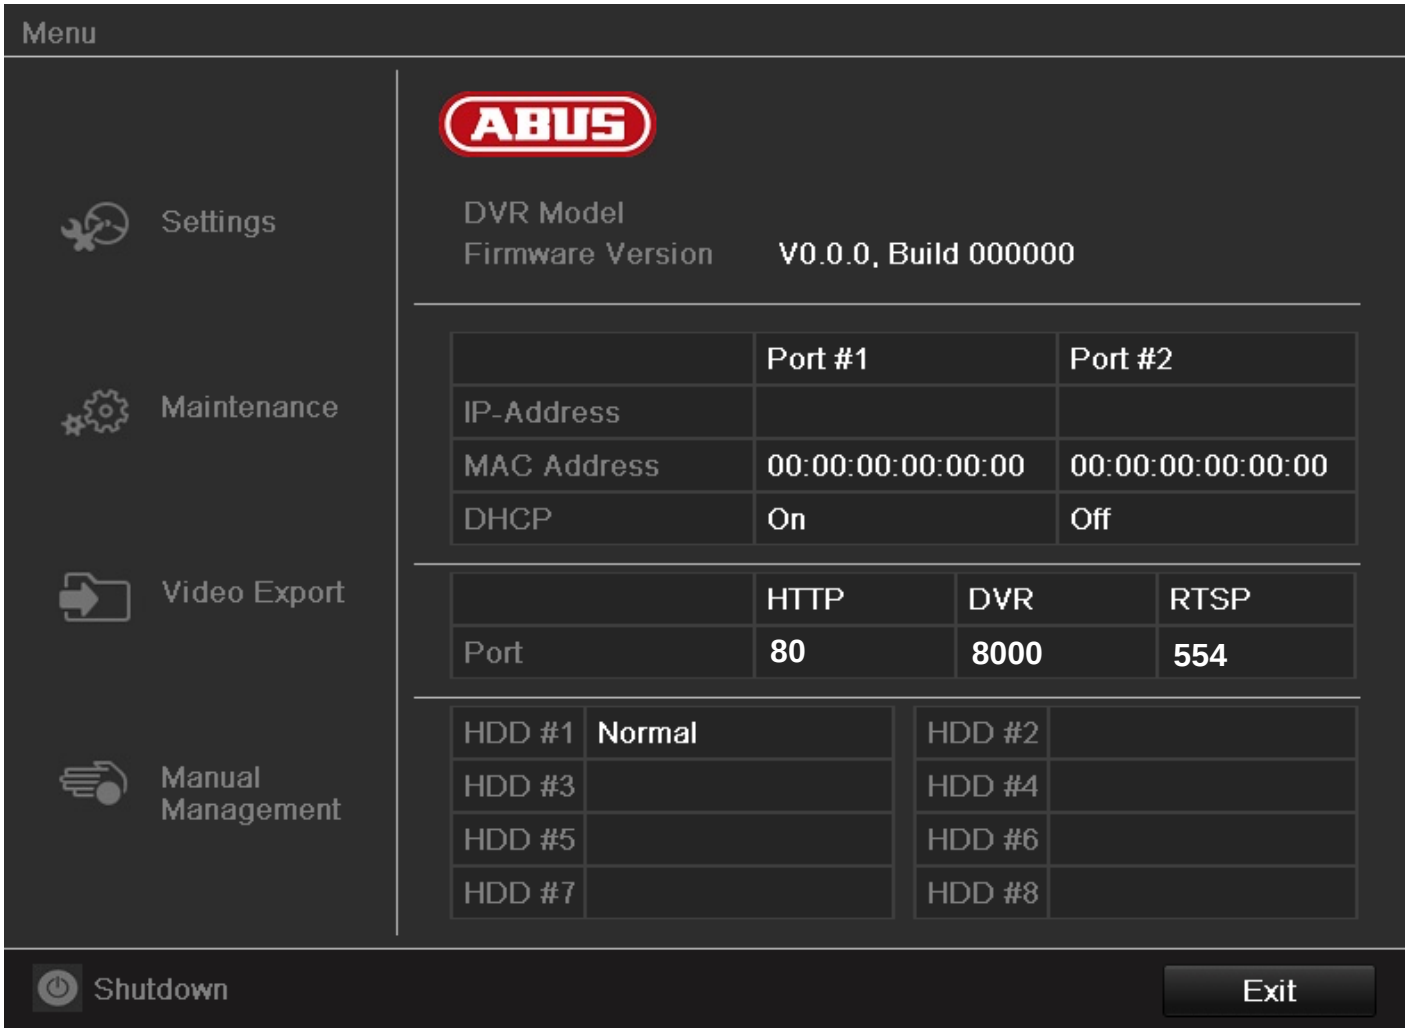

Menu description

Menü	Beschreibung	siehe S.
Settings	Includes the menus **Configuration**, **Camera**, **Record**, **HDD**, **Playback**.	90
Playback	Parameter-controlled search for video and image recordings which were triggered by events such as alarms or motion detection, as well as alarm events and markings set in playback.	117
Video Export	Feature for exporting saved recordings onto USB media.	121
Manual Management	Starts or ends the manual video and image recording of selected cameras, as well as the manual switching of alarm outputs.	123
Shutdown	Lock, shutdown or restart the device.	123

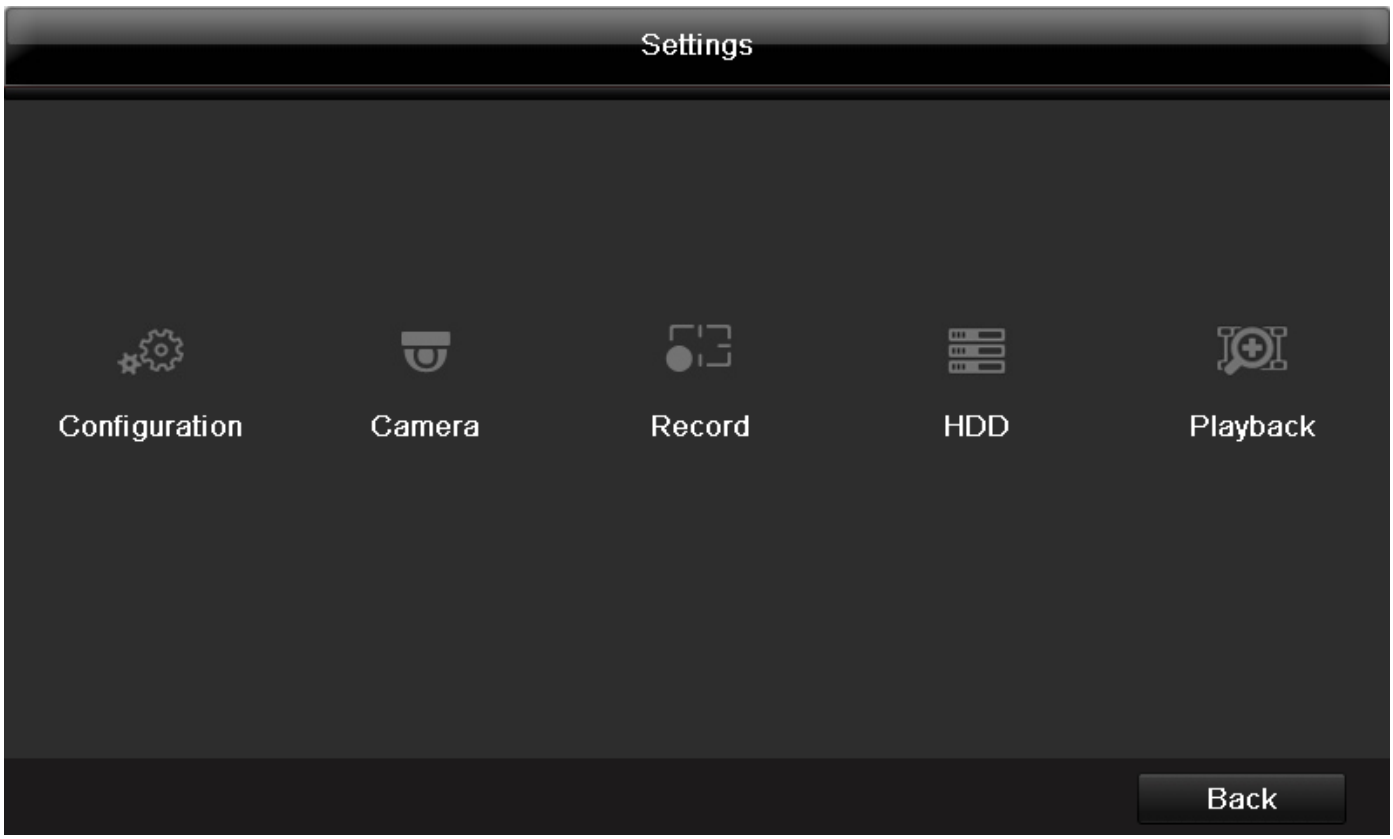

Menu description

Menu	description	page
Configuration	Used for managing all device settings (General, Camera, Record, Network, Alarm, PTZ, RS232, Display, Exception, User).	94
Camera	Menu for setting camera parameters (OSD configuration, image mode, PTZ configuration, motion recognition etc.)	129
Record	Menu to set recording parameters (time plan, camera resolution, camera stream etc.).	109
HDD	Used for initialising or managing installed HDDs (assigning read/write functions, cameras, network HDD management etc.).	112
Playback	Parameter-controlled search for video or image recordings which were started by events like alarms or motion recognition, as well as alarm events and markings set in playback.	115

Settings

Configuration

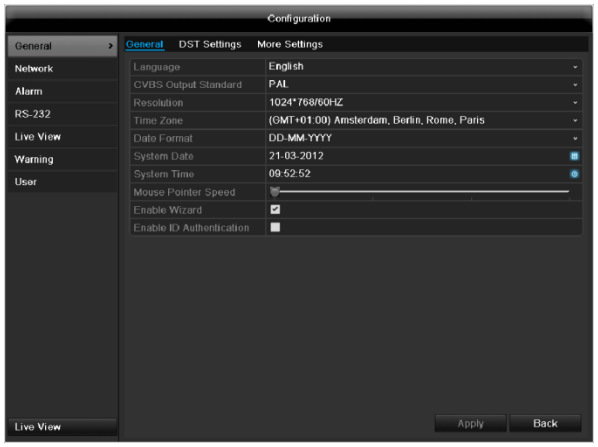

Note

The “Configuration” menu is used to manage all device settings.

Warning

Ensure that the date and time are set correctly.

IMPORTANT:

Subsequent changes to the settings can lead to data loss!

Ensure a data backup has been made in good time beforehand.

Overview

Menu	Setting	Page
General	Language, video, time, date, mouse pointer, password, time zones and other settings	94
Network	Required network settings (manual IP, DHCP, PPPOE, DDNS etc.)	96
Alarm	Assignment and parameterisation of detectors to alarm inputs and relay outputs	125
RS-232	Parameters on the serial connection	103
Live View	Display settings and assignment of the event output	103
Warning	Behaviour of the device in exceptional cases (HDD full, network disconnected etc.)	103
User	Adding and changing users, assigning authorisation rights	103

Note

Pay attention to the instructions in the corresponding sections.

General

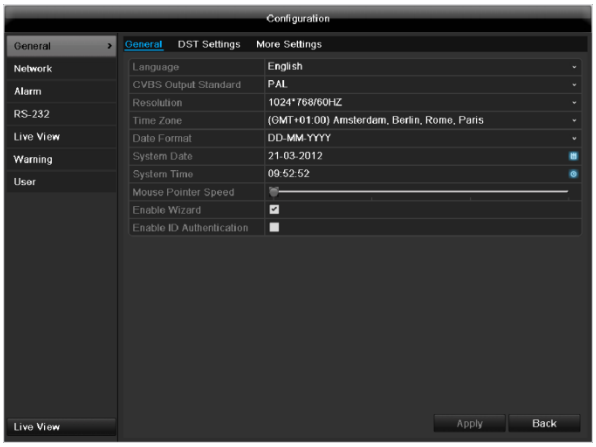

“General” tab	Setting
Language	Language on the OSD
CVBS Output Standard	PAL / NTSC
Resolution	Resolution on the monitor
Time Zone	GMT (Greenwich Mean Time)
Date Format	MM-DD-YYYY, DD-MM-YYYY, YYYY-MM-DD
System Date/Time	Date and time
Mouse Pointer Speed	Set on the scroll bar (left = low speed; right = high speed)
Enable Wizard	Box not ticked: Wizard will not appear after restart of the device. Box ticked: Wizard will appear after restart of the device.
Enable ID Authentification	Box not ticked: In order to enter a menu no password has to be entered. At access by network the password has to be entered. Box ticked: Password must be entered in order to use the menu.

TAB "DST settings"	Setting
Auto DST Adjustment	With an activated check box, the device converts automatically to summer time.
Enable DST	With an activated check box, an exact start / end date can be selected
From / To	Date of DST start / end
DST Bias	Daylight Saving Time Bias: Correction of the DST to the reference time
TAB "More Settings"	**Setting**
Device Name	Unique specification of the device
Device Number	Used for unique identification when using remote control
Output Mode	Makes the image softer or sharper.
CVBS Output Brightness	Scroll bar (left = darker; right = brighter)
Operation Timeout	Never / 1 to 30 minutes – regulates how long the menu is shown
Menu Output Mode	Defines the video outputs on which the OSD menu is visible. Options: Auto, HDMI/VGA, CVBS
Event Hint	Activates the event display in the live image (exclamation mark in the live image)

Confirm the settings by clicking **Apply** and leave the menu with **OK.**

Network configuration

Correct network settings are essential in the following cases:

- When using remote control of the device and surveillance over your server

Note

Please read the following basic instructions before setting up the device.

A network is a connection of at least two network-capable devices.

Transmission types:

- Wired networks (e.g. CAT5 cable)
- Wireless networks (WLAN)
- Other transmission types (Powerline)

All systems have certain similarities, but can also differ in many ways.

Terms and definitions

An overview of relevant terms when using the device in a network can be found below.

Parameter	Setting
IP address	An IP address is the unique address of a network device within a network. This address may only appear once within a network. Certain IP address ranges are reserved for public networks (e.g. the Internet).
Private address range	e.g. 10.0.0.0 – 10.255.255.255 Subnet mask: 255.0.0.0 172.16.0.0 - 172.31.255.255 Subnet mask: 255.255.0.0 192.168.0.0 - 192.168.255.255 Subnet mask: 255.255.255.0
Subnet mask	A subnet mask is a bit mask used for making decisions and assignments during routing. 255.255.255.0 is the standard subnet mask in home networks.
Gateway	A gateway is a network device which allows all other network devices to access the Internet. This can be the computer connected to the DSL modem or – usually – the router or access point within the network.

Parameter	Setting
Name server	The name server is responsible for assigning a unique IP address to a web address or URL (e.g. www.google.de). Also known as DNS (Domain Name Server). When a domain name is entered into a browser, the DNS searches for the corresponding IP address of the server and forwards the query on. The IP of the provider's DNS can be entered here. However, it is often sufficient to select the IP of the gateway. This then forwards the queries independently to the provider DNS.
DHCP	The DHCP server automatically assigns the IP address, subnet mask, gateway and name server to a network device. DHCPs are available in current routers. The DHCP service must be specially set and activated (see the corresponding manual for more information). Note: When using fixed IP addresses and a DHCP server, make sure that the fixed IP addresses are outside the address range assigned by DHCP. Otherwise, problems could occur.

Port	A port is an interface used for communication by different programs. Certain ports are fixed (23: Telnet, 21: FTP), whilst others can be freely selected. Ports are important for different applications (e.g. external access to the device over a browser).
MAC address	The MAC address (Media Access Control or Ethernet ID) is the specific hardware address of the network adapter. This is used for the unique identification of the device in a computer network.

Network layout

The device must be physically connected to the network over a CAT5 cable (see the connections on page 71).

Note

Pay attention to the specific information and instructions on the network devices.

Several switches, routers and access points can be connected to each other. Firewalls and other security software can affect the network.

Warning

When using a router, the network clients (e.g. the recorder) can be connected to the Internet and vice versa.
Make sure to use protective measures to prevent unauthorised external access (e.g. firewall, changing passwords, changing ports)!

Network-configuration

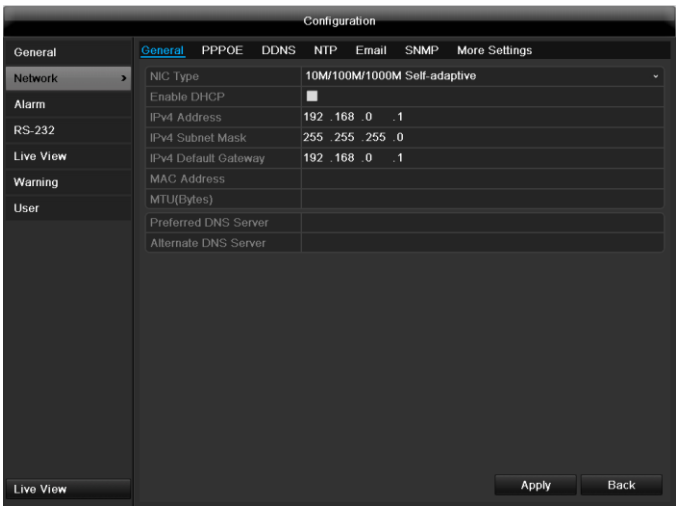

TAB	Settings
General	Settings for the local net and selecting the network mode.
PPPOE	PPPOE is used on ADSL connections and when using modems in Germany. Click on “Set” to enter the access data (ID and password) for your provider.
DDNS	Server for Dynamic Domain Name System management. Used for updating host names or DNS entries
NTP	Network Time Protocol Server for time synchronisation
Email	Used to specify the e-mail settings which are sent as an e-mail to a specific address in the event of an alarm.
FTP	Configure the address of an FTP server and the path for saving the files.
SNMP	Configure the parameters to receive information about the device status.
More Settings	Communication and HTTP port.

TAB General

Parameter	Setting
Working Mode	Net fault tolerance: Both network adapters (NIC) use the same network settings. The 2nd network adapter remains, in the event of problems with the 1st network adapter, available. Load balance: Both network adapters (NIC) use the same network settings. The bandwidth is split between the two adapters. Multi-address (standard): The network adapters (NIC) use different network settings. One adapter is defined as the standard adapter for external communication. The 2nd adapter is used for connecting IP cameras.
Select NIC	Choose between LAN1 and LAN2 for editing.
NIC Typ	Set the transmission speed of the installed network card here. Tip: 10M/100/1000M self adaptive
Enable DHCP	Tick the box if the IP addresses are assigned dynamically via DHCP in the network. DHCP activated: Subsequent entry fields are inactive (parameters assigned via DHCP). Note: If the IP addresses are assigned manually, ensure that DHCP is not active (box not ticked).
IPv4 Adress	Address of the network device in the network (manual assignment)
IPv4 Subnet Mask	Usually 255.255.255.0
IPv4 Default Gateway	Address of the gateway for Internet access
IPv6 Adress 1	Currently no functioning
IPv6 Adress 2	Currently no functioning
IPv6 Standard Gateway	Currently no functioning
MAC Adress	Hardware address of the installed network card
MTU (Bytes)	Describes the max. size of the largest protocol data .
Preferred DNS Server	Address of the Domain Name Server (usually the IP address of the gateway)
Alternate DNS	IP address of the alternative DNS server
Default Route	Selection of the Ethernet connection for the external network connection
	(e.g. Internet).

Note

In certain modes some of these settings cannot be selected.

PPPOE

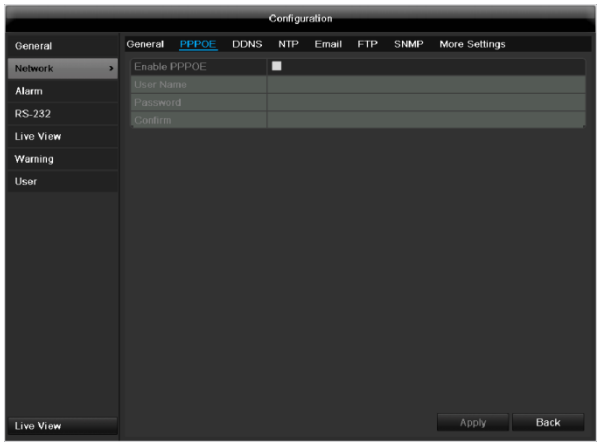

1. Tick the PPPOE box, enter the user name (Internet access ID) and password, then confirm the password.
2. Confirm the settings by pressing **Apply**.

Warning
Use PPPOE only if there is no router available.

DDNS

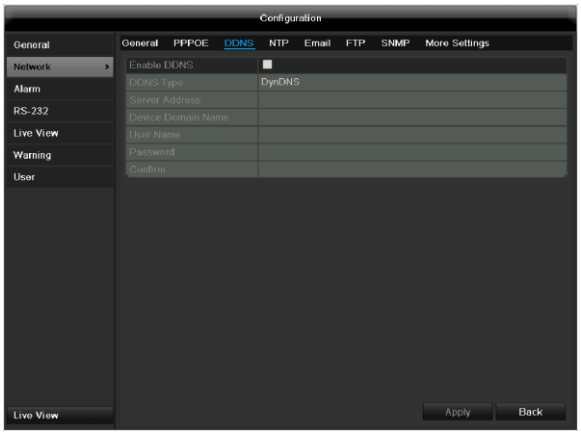

1. To use the ABUS DDNS function, you must first set up an account under www.abus-server.com. Please note the FAQs on the website when doing this.
2. Tick the “Enable DDNS” box, enter ‘ABUS DDNS’ as the “DDNS Type”, then enter www.abus-server.com or “62.153.88.107” under “Server Address”.
3. Confirm the settings by pressing **Apply**. The IP address of your Internet connection is now updated on the server every minute.

NTP

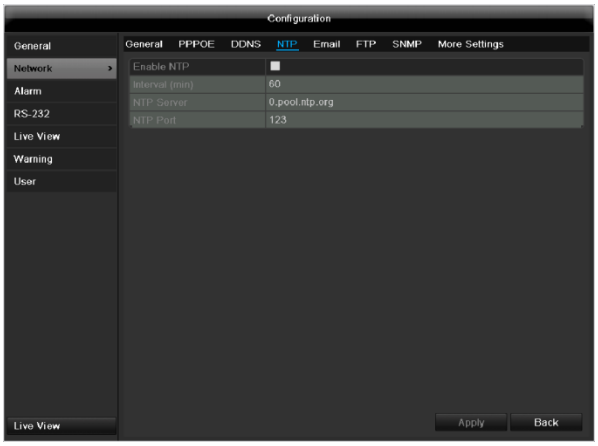

Note
The recorder can synchronise the time with an external server. Several server addresses are available on the Internet for this purpose.

1. Tick the “Enable NTP” box and then enter the interval at which the synchronisation should be made again. Enter the IP address of the NTP server and the NTP port.
2. Confirm the settings by pressing **Apply**.

Email

In the event of an alarm, the device can send a message by e-mail. Enter the e-mail configuration here:

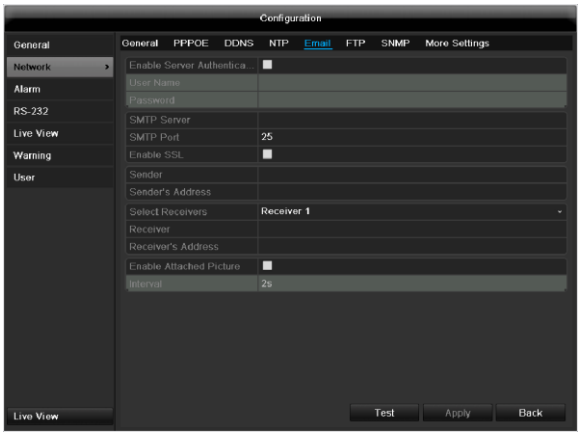

Parameter	Setting
Enable Server Authentica...	Tick the box when authentication is made on the server of the Internet provider
User Name	E-mail account at the provider
Password	Password connected to the e-mail account
SMTP Server	SMTP server address of the provider
SMTP Port	Enter the SMTP port here (Default: 25)
Enable SSL	Tick the box to activate the e-mail encryption
Sender	Name of the sender

Sender´s Adresse	Corresponding e-mail address for the e-mail account
Sender´s Receiver	Select three possible recipients for the e-mail
Receiver	Enter the name of the recipient here
Receiver´s Adresse	Enter the e-mail address of the recipient here
Enable Attached Picture	Tick the box when camera images should also be sent with the e-mail as photo files
Interval	Select the interval between the individual recordings (2 to 5 seconds)

1. Enter the parameters of the e-mail notification.
2. Click on **Test** to send a test e-mail.
3. Please clarify if your settings are correct and you have received a confirmation mail. Then click on **Apply.**

Note

The device sends an e-mail to the specified recipients.

If the e-mail is not received, check the settings and correct them.
If necessary, check the spam filter of your e-mail client.

Note

Because of the cause of compatibility please do only use E-Mail clients where a dial-up via SMTP is possible.

SNMP

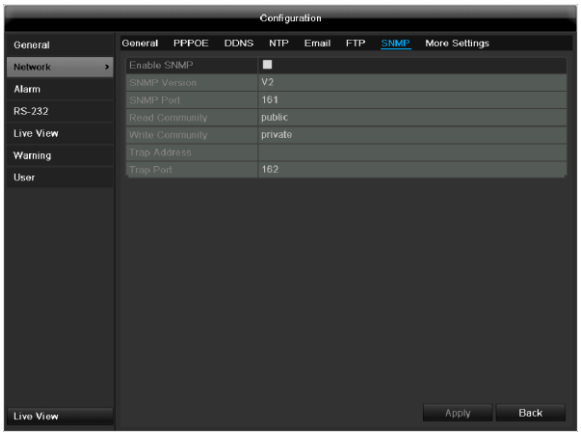

Parameter	Setting
Enable SNMP	Activate the checkbox to create a connection to SNMP software
SNMP Version	Version of the SNMP system
SNMP Port	Enter the SNMP port (Default: 161)
Read Community	Enter the “Key” according to the settings of your SNMP software.
Write Community	Enter the “Key” according to the settings of your SNMP software.
Trap Adresse	Enter the IP address of the SNMP manager
Trap Port	Enter the trap port (Default: 162)

UPnP

Parameter	Setting
Activate UPnP	Activates the automatic UPnP port forwarding in the router
Allocation type	The port allocation for port forwarding can be assigned automatically or manually.
Port type	Server port: General communication port HTTP port: Port for the HTTP protocol RTSP port: Port for the RTSP protocol HTTPS: Port for a secure HTTP protocol connection
Edit	Activates editing for the external port
External port	Port for accessing the corresponding service on the external router side
Allocate IP address	Internal IP address of the DVR
Port	Internal port for the corresponding service in the DVR
Status	Activity status or the corresponding port forwarding

Note

SNMP is used for monitoring the device status. For this you need SNMP software not available from ABUS.

Confirm the settings by clicking **Apply** and leave the menu with **Back.**

More settings

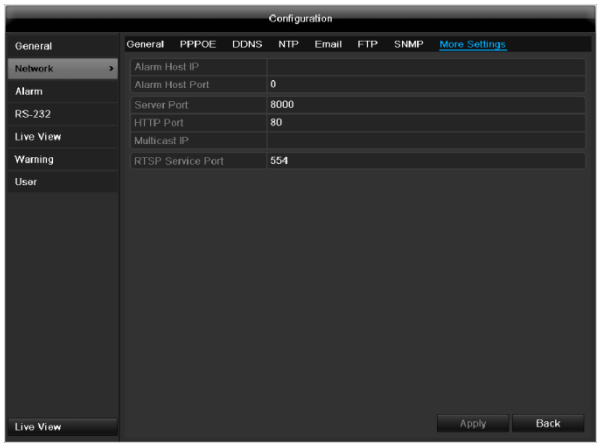

Parameter	Setting
Alarm Host IP	Network address of the PC where the CMS is installed
Alarm Host Port	Port of your CMS Station
Server Port	Port for data communication (General: 8000)
HTTP Port	Port for web server (General: 80)
Multicast IP	In order to minimize traffic you can enter a Multicast IP. The IP address has to match the IP address of the PC running the CMS software.
RTSP Service Port	RTSP-port (Default: 554)
Activate HTTPS	Activates a secure connection via HTTPS
HTTPS port	Allocates the HTTPS communication port
Activate high-speed download	The outgoing network performance is increased using resources otherwise used for local OSD display. This function should only be activated temporarily, for example to speed up data back-up to a PC.

Note

Server port 8000 and HTTP port 80 are the standard ports for remote clients and remote Internet browser access.

Note

With Alarm Host IP/Port you configure the address of your CMS software. The CMS software is notified when there is an alarm, and performs various reactions depending on the setting.

Alarm

Alarm status

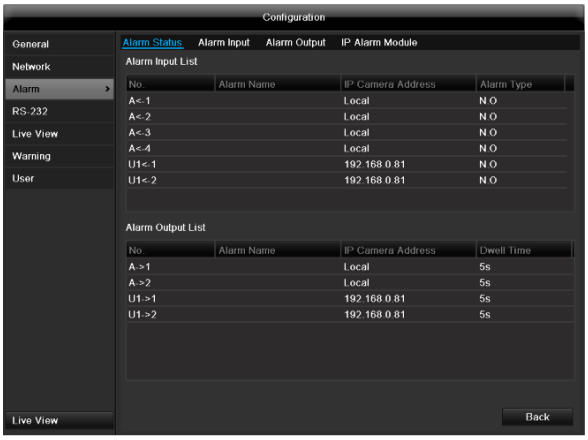

Here you see a list with all the alarm inputs and outputs and their current status.

Alarm input

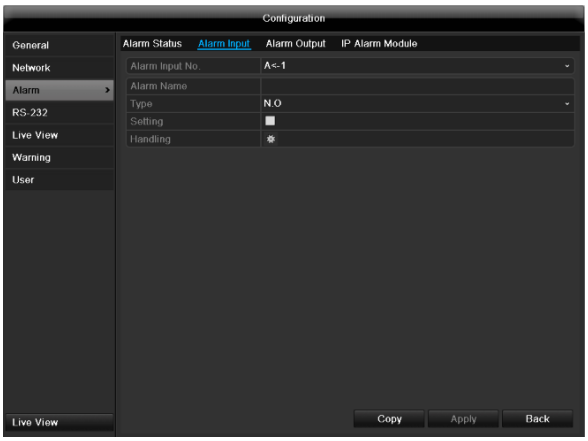

- Select a reaction in the case of an alarm by clicking the ‘Setting’ symbol for “Handling”.

Parameter	Setting
Alarm Input No.	Select the alarm input to make the settings
Alarm Name	Enter a clear description here (e.g. door contact on warehouse)
Type	N.O.: Normally open circuit N.C.: Normally closed circuit
Setting	Activates a response
Response	Edits a response

- Activate the alarm input by ticking the checkbox for “Setting”.
- Define the response of the recorder when there is an alarm under “Handling”.
- Click **Copy** to apply these settings for other cameras.
- Confirm the settings by clicking **Apply** and leave the menu with **OK.**

Handling

TAB Trigger channel

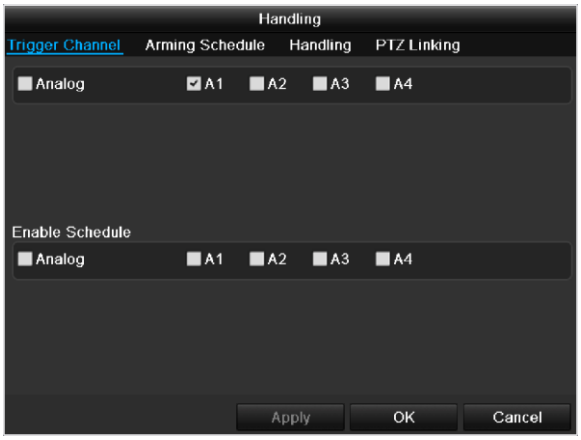

Tick a checkbox to select which camera channel is triggered in the case of an alarm.

TAB Arming schedule

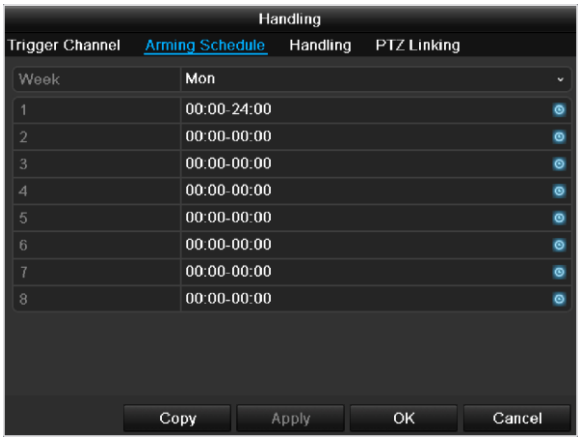

- Define the time at which the responses selected in the TAB “Handling” are activated when there is an alarm.
- Click **Copy** to apply these settings for other days of the week or the entire week.

TAB Handling

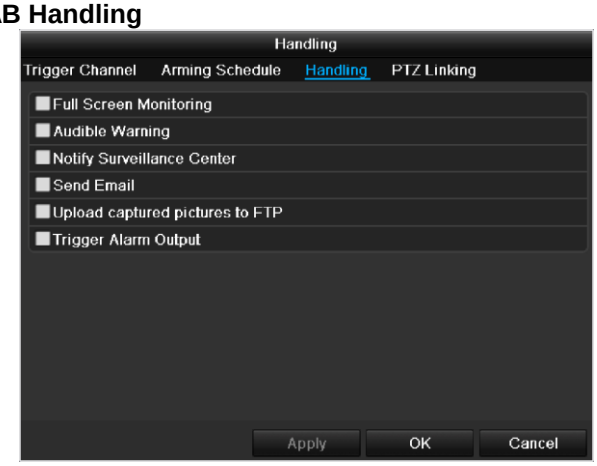

Define the response in the case of an alarm:

Parameter	Setting
Full Screen Monitoring	A message appears on the monitor.
Audible Warning	The device emits a repeating tone.
Notify Surveillance Center	Sends an alarm signal to a PC with ABUS CMS software. The software must be enabled and the recorder set to surveillance mode on the PC.
Send E-Mail	An e-mail is sent to a specific e-mail address (see page 96).
Trigger Alarm Output	see also page **Fehler! Textmarke nicht definiert.**

Confirm the settings by clicking **Apply** and leave the menu with **OK**.

Note

To record with the aid of an alarm, you must set up the schedule under **Recording** (see p. 109).

TAB PTZ

Parameter	Setting
PTZ	Select a PTZ camera
Open presets	A preset (preset item) can be opened
Preset	Selects a preset
Start patrol	A patrol can be started
Patrol	Patrol selection
Start pattern	A pattern can be opened
Pattern	Pattern selection

Alarm output

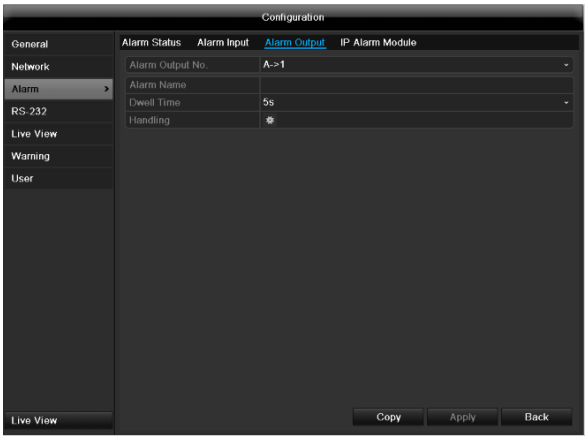

1. Select an alarm output to be configured in the drop-down menu under “Alarm Output No.”.
2. Assign any name to the alarm output in “Alarm Name”.
3. In “Dwell Time”, select how long the alarm is triggered for.
4. In “Handling”, select the schedule for the alarm output.
5. Click **Copy** to apply these settings for other alarm outputs.
6. Confirm the settings by clicking **Apply** and leave the menu with **OK**.

RS-232

Currently no functioning.

Live view

See page 87.

Warning

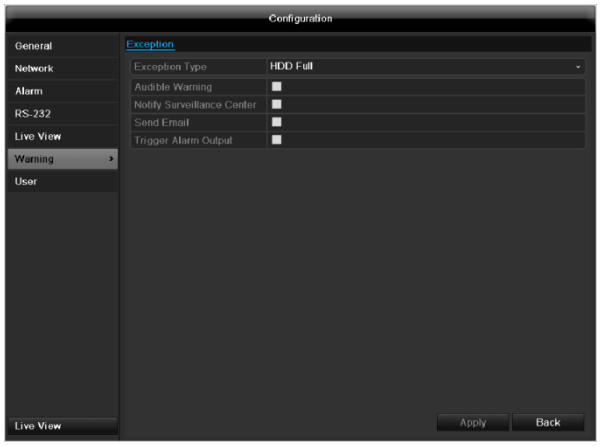

Note

Enter the trigger under “Exception Type”, for example:

- HDD Full
- Disconnected
- Video signal not normal
- Video input/output signals not equal

After doing this, specify the device behaviour.

Confirm the settings by clicking **Apply** and leave the menu with **Back**.

User

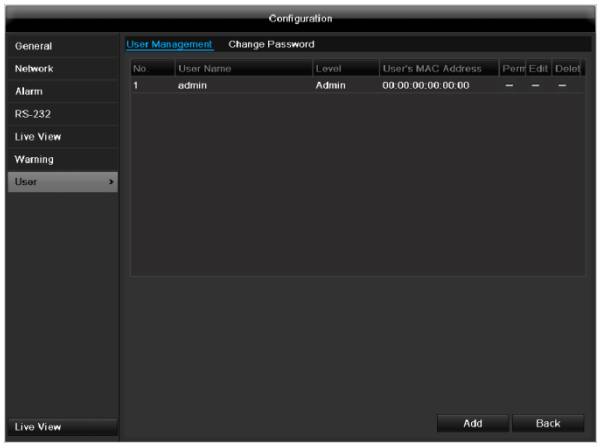

Warning

Note down the admin password.
The following password is preset

“1 2 3 4 5”

You can add new users, delete existing users and change the settings in the “User Management” menu.

1. To add a new user, select **Add**.

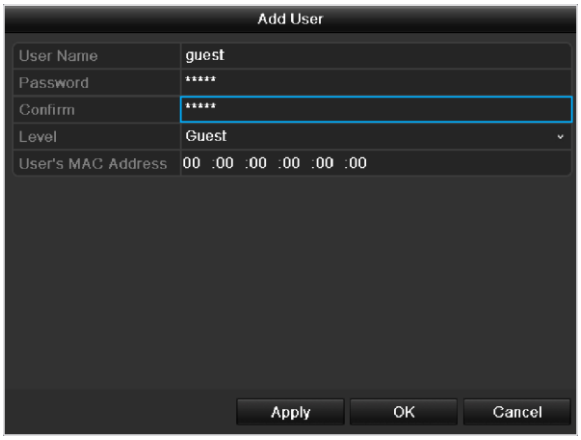

Parameter	Setting
User Name	Unique identification
Password	Access code for the device (device management) Note: Change all passwords on a regular basis, using a combination of letters and numbers. Note down all passwords in a safe place.
Confirm	Enter the access code again here
Level	IMPORTANT: More access rights can be set on the **Manager** level than on the **User** level.
User's MAC Address	MAC address of the network adapter on the PC of the corresponding user **Note:** This limits access to the PC whose MAC address is entered here!

2. Enter the name and password and confirm the password in the field below.
3. Select the level and enter the MAC address.
4. Confirm the settings by clicking **Apply**.

Warning

Pay attention to the instructions below on assigning access rights.

Permission

Control the access rights of the user by clicking the “Permission” symbol. Only the access data of users added manually can be changed:

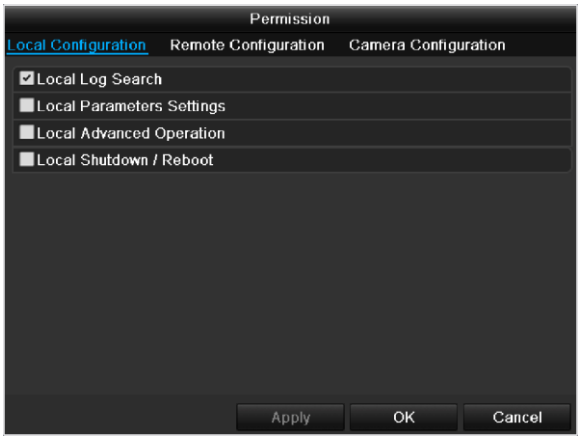

Note

The user can make the settings locally (i.e. on the device) or change the parameters.

The user can access the device via the network connection.

The “Camera Permission” tab is used to set access rights for individual cameras (network or local).

Parameter	Setting
Local Configuration	Local Log Search Local Parameters Settings Local Advanced Operation Local Shutdown / Reboot
Remote Confguration	Remote Log Search Remote Parameters Settings Remote Serial Port Ctnrol Remote Video Output Cntrol Two-way Audio Remote Alarm Control Remote Advanced Operation Remote ShutDown / Reboot
Camera Configuration	Camera Permission

Warning

Change the general settings of the user (name, password, level, MAC address) by clicking the “Edit” symbol or in the TAB “Change password”.

Camera

Camera

TAB analog cameras

Parameter	Setting
Camera no.	Shows the camera number
Camera name	Shows the camera name
Status	Automatic video signal state detection
Live	A preview of the live image can be displayed here
Status	Channels can be activated or deactivated here

TAB IP cameras

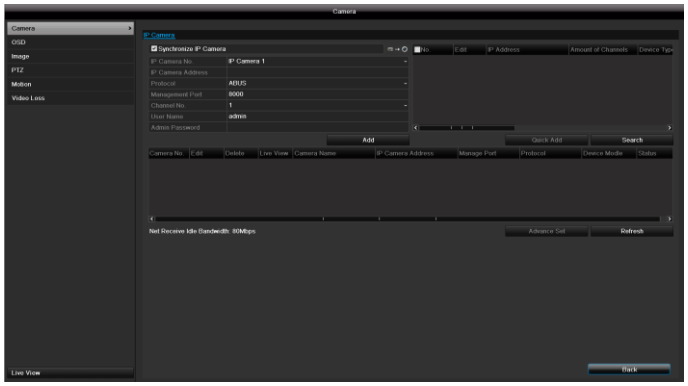

No.	Shows the camera number
Camera address	Shows the set IP address of the camera
Log	Selecting the log
Managing the port	Setting for http ports of the camera
Channel no.	Channel number display
User name	Enter the user names of the camera here
Admin password	Enter the administrator password here
Display mode	Settings for displaying the camera name and date

Click on Add to link a camera to the system.

Click on “Search” to search the network for the available ABUS network cameras. Mark the required cameras and then click on “Quick Add” to link the cameras.

Note

In some cases, you need to enter the user names, password and http port by hand afterwards.

The available bandwidth shows you how much bandwidth is still available for setting up the network camera.

OSD

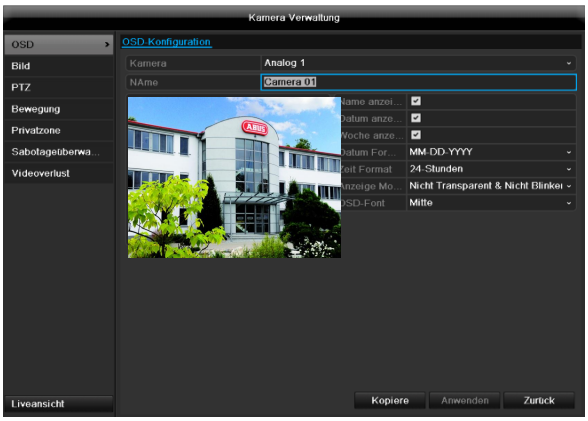

Camera	Camera to be set
Camera Name	Allocation of camera name
Display Name	Activate / deactivate display of camera name in the live view
Display Date	Activate / deactivate display of date in the live view
Display weekday	Displays the weekday in the live cast
Display Week	Activate / deactivate display of week in the live view
Date Format	Selection of date display type
Time format	Choose between 24-hour and 12-hour time format for display
Position	The position of the text overlay can be set directly in the preview image using the mouse. Simply use the mouse to drag the corresponding text overlay frame.
Time Format	12 hours / 24 hours
Display Mode	Settings relating to the presentation of camera name and date

Image

Note

You can also start the patrol directly in the live image of the respective network camera.

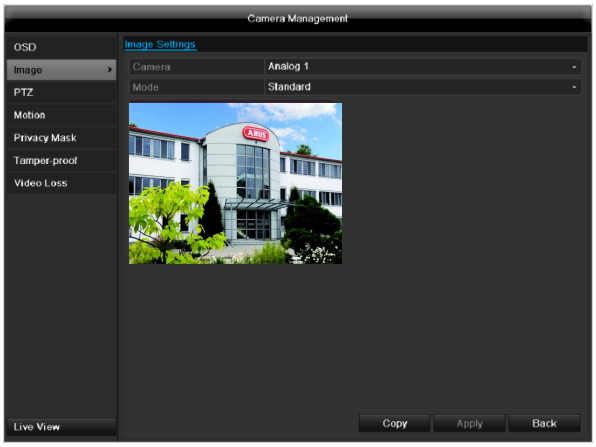

Select the camera channel to be processed at “Camera”. Adapt the camera image to light conditions at “Mode” by means of specified settings or with user-defined settings.

PTZ

Note

Here you can set up presets and patrols for the TVIP2xxxx network cameras.

Saving and retrieving presets

1. Use the arrow buttons to move the network camera to the required image section and save the position, for example as Preset 1

2. Click on Call up to move to Preset 1.

Setting up and calling up patrols

1. Create several presets to use for the patrol

2. Click on + to select a preset
3. Add more presets to set up the required patrol.
4. Then click on the play symbol to start the patrol.

Motion

Select the camera channel under “Camera”.

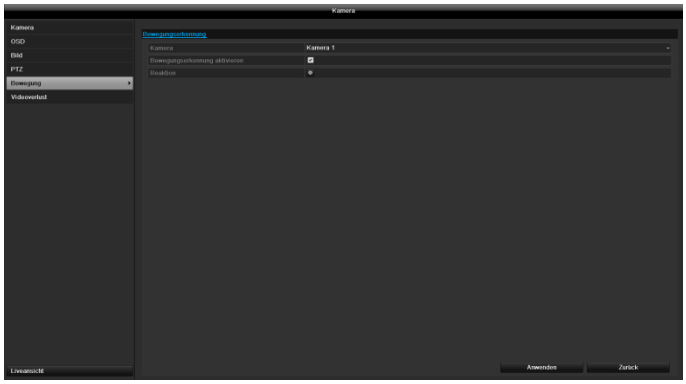

Select the checkbox for motion detection.
The motion detection in the network camera must also be activated. For further details, refer to the network camera manual.

Note

In order to record using the motion recognition, you must set the time plan at recording (see p. 109).

Handling

Trigger Channel

When “Reaction” is clicked, the TAB **Trigger channel** appears (only with motion recognition):

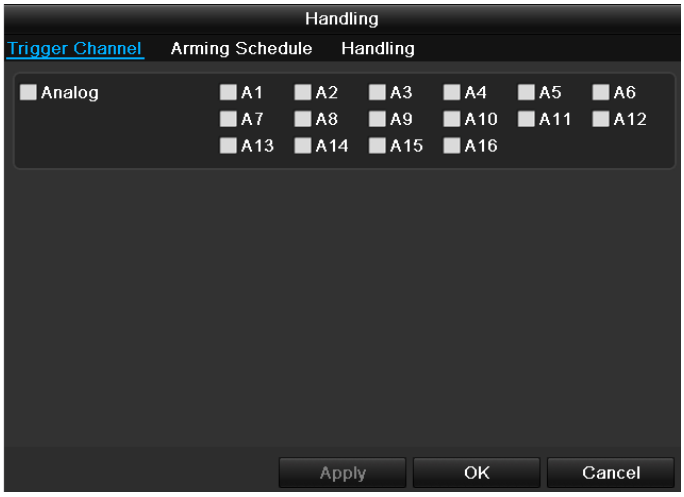

Select one or more camera channels that should carry out a reaction in the event of an alarm.
Confirm the settings by clicking **Apply** and leave the menu with **OK**.

Armin Schedule

Select the TAB **Arming Schedule.**
Here you set the times when the reactions in the TAB **Reaction** are triggered.

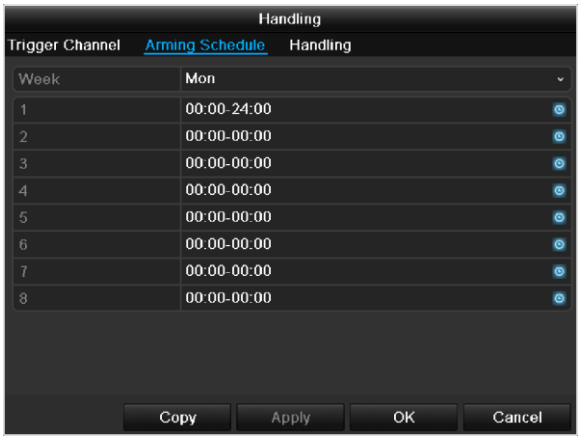

1. Select the day and enter the schedule.

Note

You can define up to 8 time periods (each from 00:00 to 00:00). The times in the individual periods must not overlap.

2. Select whether the settings should be applied to all days of the week with using **Copy**.
3. Confirm the settings by clicking **Apply** and leave the menu with **OK.**

Handling

Click on the TAB **Handling.**
Here you can configure the behavior of the recorder during a detected event (for example: motion got detected) by clicking the respective check box.

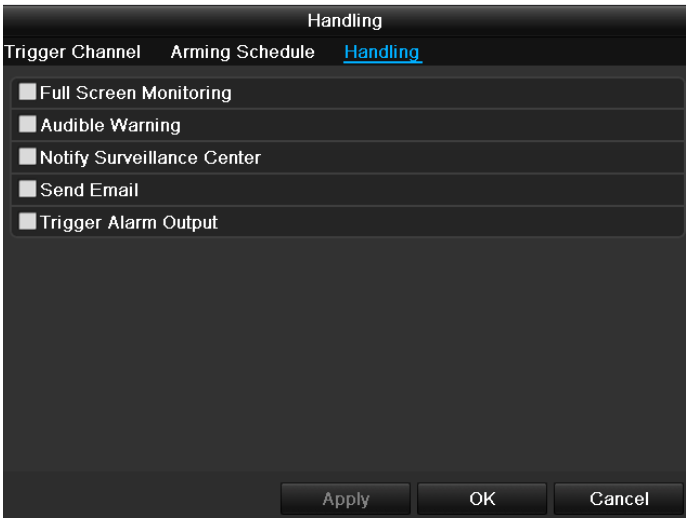

Parameter	Notification
Full Screen Monitoring	The camera is displayed as a full-screen picture in live cast
Audible Warning	The device emits a repeating tone
Notify Surveillance Center	Sends an alarm signal to a PC with the ABUS CMS software. For this, the software must be running and the recorder must be in surveillance mode.
Send E-Mail	An e-mail is sent to a specific e-mail address (see page 96)
Trigger Alarm Output	see page 96

- Confirm the settings by clicking **Apply** and leave the menu with **OK**

Private zone

The private zone function allows sections of the video image to be masked. Start by selecting a camera. Activate the private zone function using the check box. Mark a rectangle at the left of the preview area. Up to four private zones can be configured. There are buttons on the right side which allow you to delete individual masks or all masks.

Tamper surveillance

The tamper surveillance function allows you to monitor the entire video image, or a section within the video image, for masking. Start by selecting a camera. Activate the tamper surveillance function. Mark a section within the preview window for monitoring (alternatively, mark the entire image). Schedules for monitoring and reactions when the camera is masked can be programmed as reactions (similar to motion detection). The adjustable sensitivity controls the reaction speed in the event of masking. The delete button removes the section to be monitored.

Video signal loss

In the event of video signal loss, a corresponding reaction can be triggered. Start by selecting a camera. Activate the function using the check box. Schedules for monitoring and reactions when the video signal is lost can be programmed as reactions (similar to motion detection).

Record

Setting up

Open the main menu and click on record:

Schedule

The schedule is used to specify the recording times and triggers (recording type) for the cameras. Click on the “Schedule” tab:

Note
Because there is no difference between the settings for the TABs record and instant image, these are only listed once.

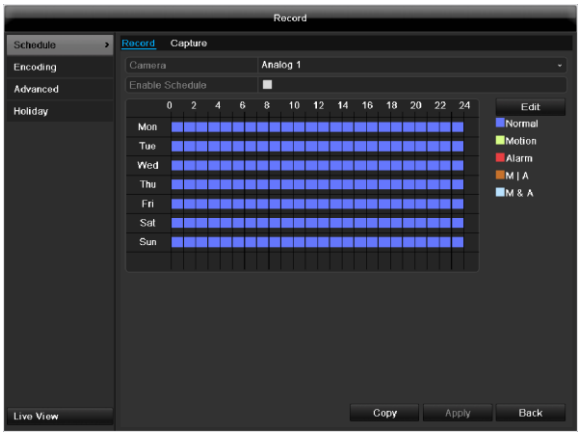

In the OSD, the hours of the respective days are listed from left to right (the days are listed from top to bottom). A colour key is shown underneath the days (i.e. the recording periods in the schedule are shown in colour according to the trigger (recording types)).

Colour symbol	Key
Blue	Normal recording: Period in hours
Yellow	Motion detection
Light blue	Motion detection and alarm
Red	Alarm
Grey	No selection
Brown	Motion or alarm

- Select the camera and click on the check box **Enable Schedule.**
- Click on **Edit** to specify the type and duration of the time plan

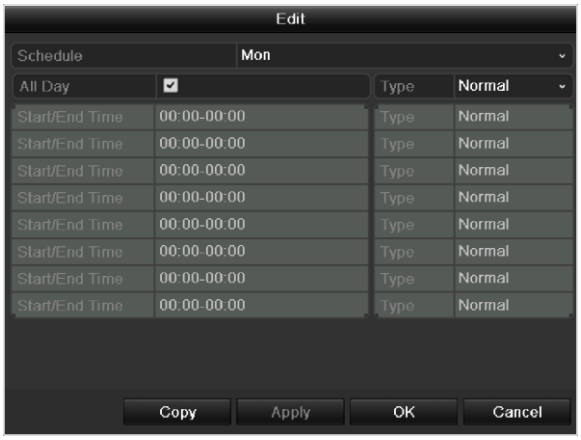

1. Define the day to be set in the pull-down menu at ‘Schedule’.
2. Activate/deactivate ‘All day’. If the full day is active, no definite times can be entered as the setting is now valid for the whole day.
3. To make specific time settings, deactivate the “All Day” box.

Application example
Recording should run from 11:00 to 07:00. 2 time zones must be set up for this:
1. 11:00 AM - 24:00PM
2. 00:00 AM - 7:00 AM

4. Specify the recording type in the drop-down menu:
   - Time
   - Motion detection
   - Alarm
   - Motion detection or alarm
   - Motion detection and alarm

Note
To record using motion detection or the alarm, you must first set this up in the Camera menu (see p. **Fehler! Textmarke nicht definiert.** “Setting up of zones”) or Configuration (see p. **Fehler! Textmarke nicht definiert.**“Alarm”).

5. When making a specific time setting, you can define up to 8 time periods (each from 00:00 to 24:00). The times in the individual periods must not overlap.

Note
The “Time” recording type defines the time window where a recording is made.

The other events (e.g. motion detection and/or alarm) only trigger the recording after the specific event has occurred.

- At **Copy** you can take on this setting for other days or the whole week.

6. Finalize your settings in the record screen with **Apply** and then **OK.**

Encoding

TAB Record

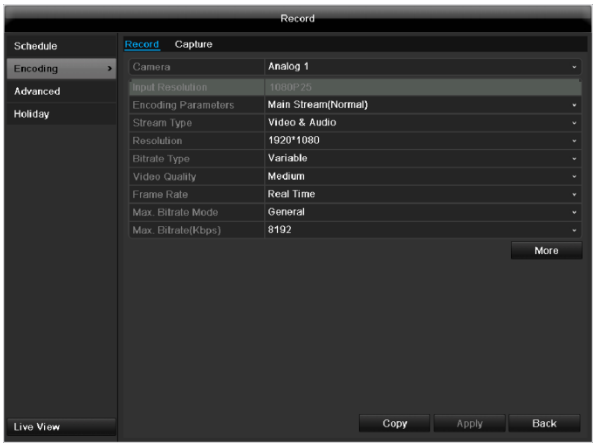

The following setting options are available in this sub-menu:

Confirm the settings by clicking on **Apply** and exit the menu with **OK**.

Pre-record	Recording period before an alarm (in seconds)
Post-record	Recording period after an alarm (in seconds)
Record Audio	Audio record yes/no

Confirm the settings by clicking on **Apply** and leave the menu with **OK**.

TAB Captured

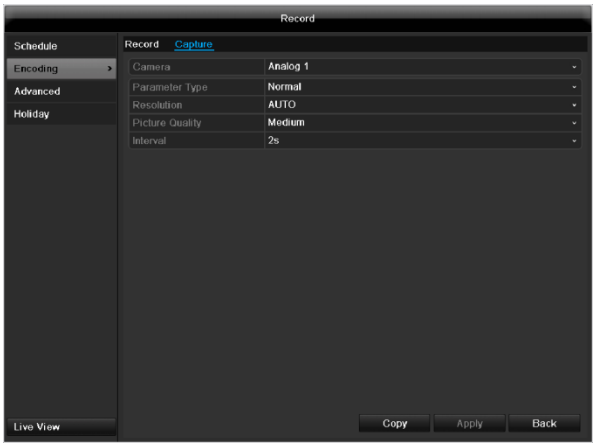

The following parameters are adjustable:

Camera	Camera to be set
Parameter Type	Schedule or event
Resolution	Auto, 4CIF(704x576), CIF(352x288), QCIF(176x144)
Picture Quality	different qualities +++: middle quality +++++: high quality
Interval	Single images are saved every 1-5 seconds according to event or time plan

Confirm the settings by clicking **Apply** and leave the menu with **Back**.

Advanced settings

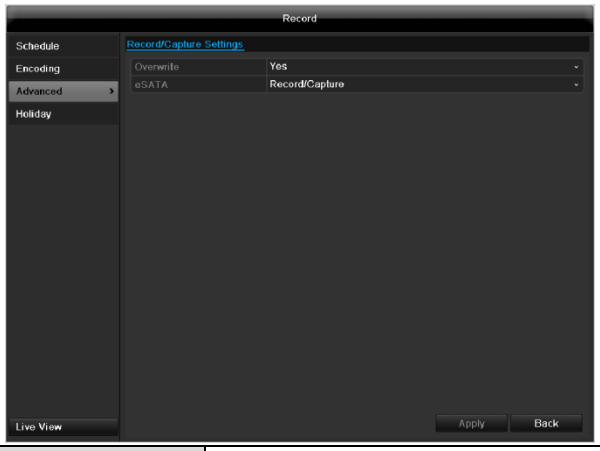

Overwrite	You can specify whether older recordings are deleted when the HDD memory is full
eSATA	Specify if an eSATA hard disc connected by USB should be used for exporting, or for additional recording/image storing.

Holidays

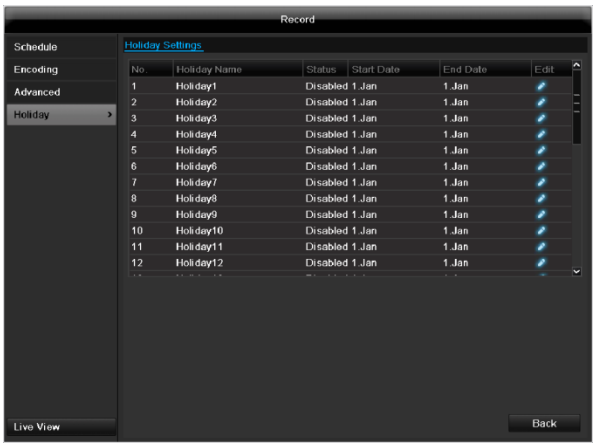

In this sub-menu, 32 different recording settings for vacations or public holidays can be applied.
To apply these settings click on the “Edit” symbol:

Holiday Name	Manual name entry of the vacation or holiday
Enable	Activate or deactivate the set vacation
Mode	According to date / week / month
Start Date	Selection of start date / start time
End Date	Selection of end date / end time

Confirm your settings with **Apply** and **OK**.

HDD

HDDs

Note
The device manages up to eight 3.5" SATA hard disk drives .
For additional data security, an e-SATA hard disc can be optionally connected.

Each of the installed HDDs must be initialised before the device can be used for recording. The device only detects the HDD and its assignment after initialisation has been made.

Warning
All data is deleted from the HDD during initialisation.

Ensure a data backup has been made in good time beforehand.

Installing the HDD

1. Disconnect the device from the mains power and open the cover.
2. Observe the applicable ESD guidelines when handling electronic devices and ensure they are earthed.
3. Do not open the device in rooms with carpets or other surfaces that can become electro statically charged.
4. Avoid bodily contact with all components on the PCB.

Warning
If you have questions regarding the information or cannot find the information you need, please contact your maintenance specialist.

5. Install the HDD and then connect it.
6. Reattach the cover and connect the device to the mains power supply.
7. Switch on the device and start the HDD menu.

Note
If the initialised HDD is not displayed, check the connections

Click on “HDD” in the menu to define settings relating to hard disc administration

HDD Management parameters

HDD information	
Label	Shows the internal connection number
Capacity	HDD capacity (in GB)
Status	Shows the current status of the HDD: Not initialised Normal Error
Property	• Redundancy: Works redundantly for data security • Read-only: Read-only protection • R/W: Read and write
Type	Local: Device HDD NFS: Network HDD If possible, avoid using NFS storage due to compatibility problems that may occur.
Free Space	Shows the approximate free memory for recordings
Group	HDD group (1 is preset) Recordings can be assigned to groups
Edit	Define hard disc settings (First adjust the camera groups; see also p.32)
Delete	Removal of the hard disc

1. Select the HDD by ticking the corresponding box.
2. Start the process by clicking on **Init**.
3. Confirm the prompt by pressing **OK**.
4. The status bar shows the progress of the initialisation.

HDD settings of the cameras

Click on the sub-menu “Advanced”.

Mode: Quote

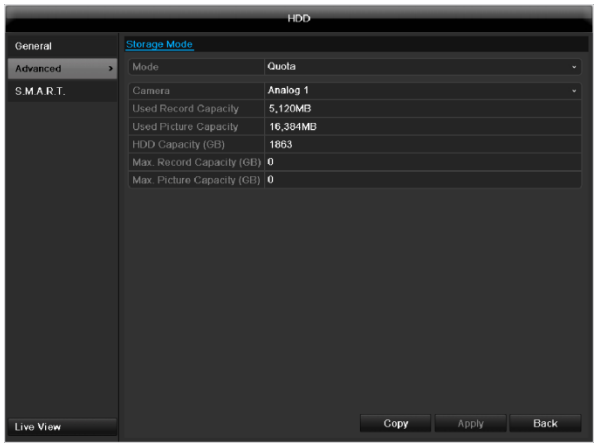

Specify the maximum recording size per camera on the hard disc.

Mode: Group

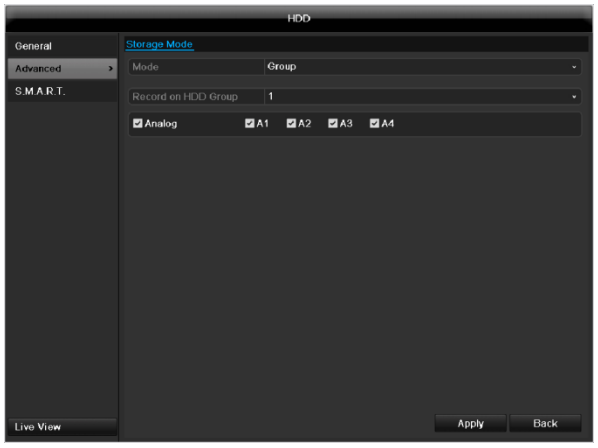

1. Select a hard disc group in the drop-down menu.
2. By activating the check box, specify which cameras should be saved on the hard disc group.
3. Click on **Apply** and confirm the restart in the next window with **OK**.

Hard disc setting

Note
To be able to define these settings, you must have allocated cameras to a hard disc group (see **HDD settings of cameras**).

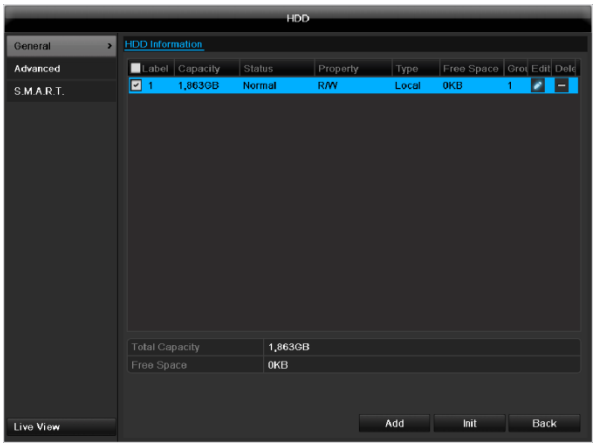

Click on the “Edit” symbol. A pop-up window appears:

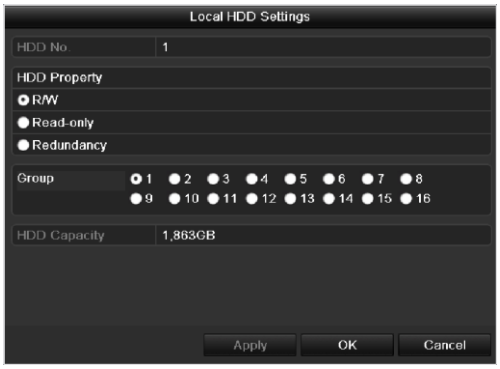

HDD No.	Selecting hard disc by means of internal connection number
HDD Property	• R/W: Readable and writable • Read-only: Write protection • Redundant: operating redundantly for data security.
Group	Selection of hard disc group
HDD Capacity	Hard disc memory

Confirm the settings by clicking **Apply** and leave the menu with **OK**.

Warning:

If only one HDD is installed and this is set to “Read-only”, then the device cannot make recordings.

Redundancy:
At least two HDDs are installed.
The redundant HDD makes an extra copy of the recordings. This is used as a data backup.

Warning:
If you want to use redundancy you have to activate the redundant storage in the recording menu (see also p. 110)

R/W
At least one HDD must have the R/W status (Read/Write). Otherwise, no recordings are possible.

Checking the HDD status

The status of each HDD can be checked in the “Maintenance” menu. S.M.A.R.T. information (Self-Monitoring, Analysis and Reporting Technology) is stored in the log data.

- Call up the log file and search according to the information/S.M.A.R.T. HDD (see page 114).

Setting up the HDD alarm

You can specify alarms to inform you of HDD errors.

- To do this, call up **Warning** in the “System Settings” menu (see page 103).

S.M.A.R.T.

S.M.A.R.T. means **S**elf-**M**onitoring **A**nalysis and **R**eporting **T**echnology.

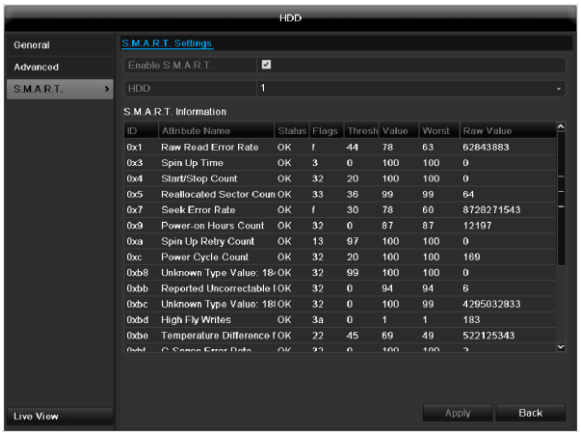
HDD
General
Advanced
S.M.A.R.T.
S.M.A.R.T. Settings
Enable S.M.A.R.T.
HDD
1
S.M.A.R.T. Information
ID Attribute Name Status Flags Thresh Value Worst Raw Value
0x1 Raw Read Error Rate OK f 44 78 63 62843883
0x3 Spin Up Time OK 3 0 100 100 0
0x4 Start/Stop Count OK 32 20 100 100 0
0x5 Reallocated Sector Coun OK 33 36 99 99 64
0x7 Seek Error Rate OK f 30 78 60 8728271543
0x9 Power-on Hours Count OK 32 0 87 87 12197
0xa Spin Up Retry Count OK 13 97 100 100 0
0xc Power Cycle Count OK 32 20 100 100 169
0xb8 Unknown Type Value: 18 OK 32 99 100 100 0
0xbb Reported Uncorrectable I OK 32 0 94 94 6
0xbc Unknown Type Value: 18 OK 32 0 100 99 4295032833
0xbd High Fly Writes OK 3a 0 1 1 183
0xbe Temperature Difference f OK 22 45 69 49 522125343
Live View
Apply
Back

Information on the hard disc status is displayed in this sub-menu.
This information helps to recognize hard disc errors. For this reason, do not deactivate this feature if possible.

Note
The log files saved for S.M.A.R.T. can be found in the menu **Maintenance** at “Log search” (see page 117).

Playback

Press **Configuration** in the main menu and then **Playback** to search for video recordings after an event or a marking, or to view your saved images.

Continous Recording

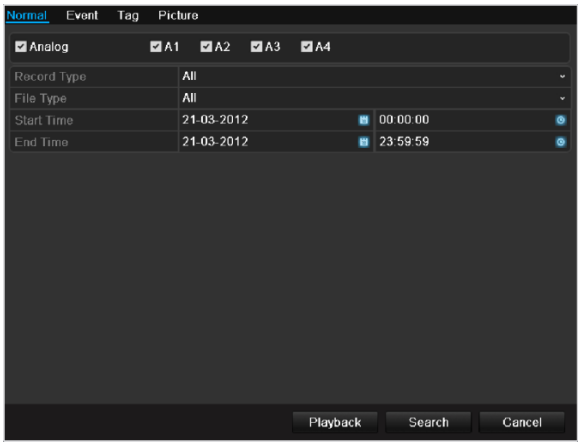

The following settings are available:

A1 - A4	Camera to be set
Record Type	Schedule, motion detection, alarm or motion detection and/or alarm, manual recording, all
File Type	Locked, unlocked, all
Start Time End Time	Enter the date and time

- Click on **Search** to search for recordings with the corresponding settings. The results are then shown:

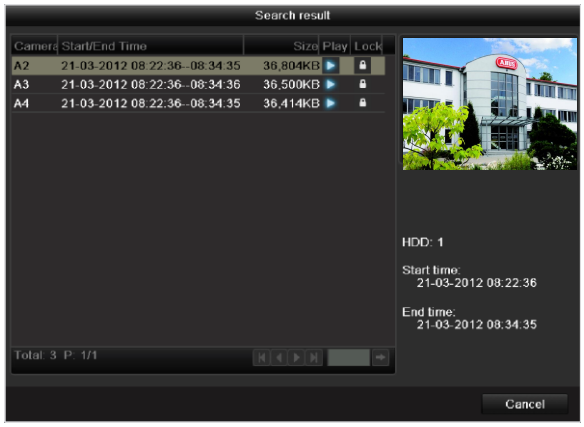

- Select the recording by clicking on the line and then on “Play”-symbol.

Note

You can return to events search at any time in the playback mode by performing a right click and selecting ‘Video Search’.

Note

The sub-menus ‘Tag’ and ‘Picture’ are almost identical with the menu described above and are therefore not listed separately.
In the sub-menu ‘Tag’, searching does not take place according to recording type, rather according to identification or a keyword of the markings’ name

Event

Please klick on the TAB „Event“.

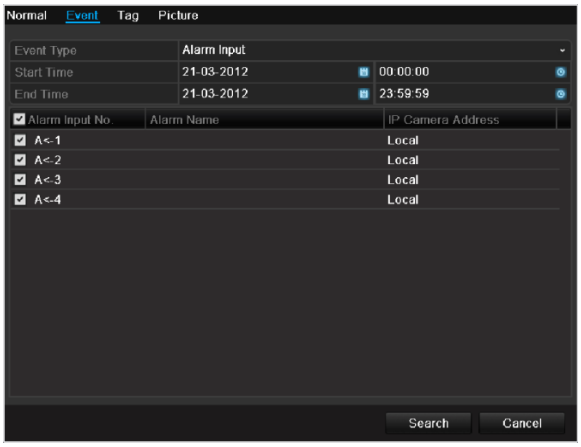

A list with all alarm inputs is displayed.
Select at ‘Event type’ whether the search should take place at alarm ‘Alarm input’ or motion ‘Motion recognition’ after recording.
Select one or more alarm inputs by activating the check box.
Klick on **Search**.
Select one of more alarm recordings on the list that appears. Click on **Details** to receive more exact information on the recordings.

Marking

Click on the “Marking” tab.

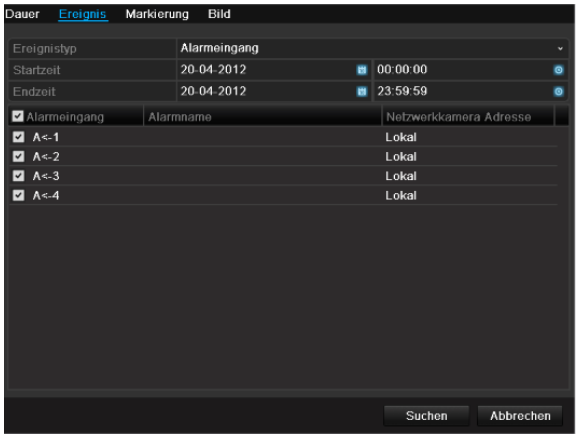

Select one or more network cameras by activating the checkbox.
Click on **Search**.

Select one or more markings from the list which appears. Click on **Details** to obtain more information about the markings.

Image

Click on the “Image” tab.

Select one or more network cameras by activating the checkbox.
Click on **Search**.

Select one or more images from the list which appears.
Click on **Details** to obtain more information about the images.

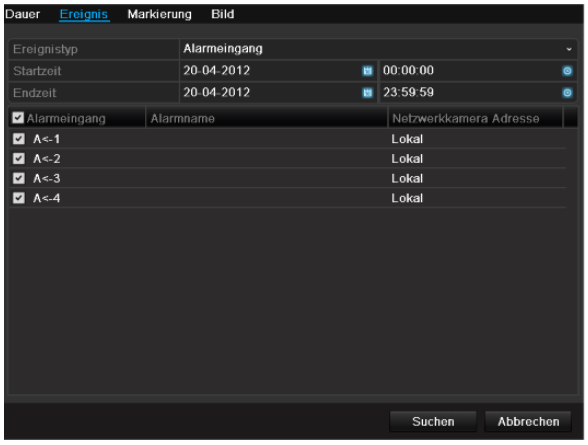

Maintenance

Note

This menu is used for device maintenance, and should only be operated by experienced users.

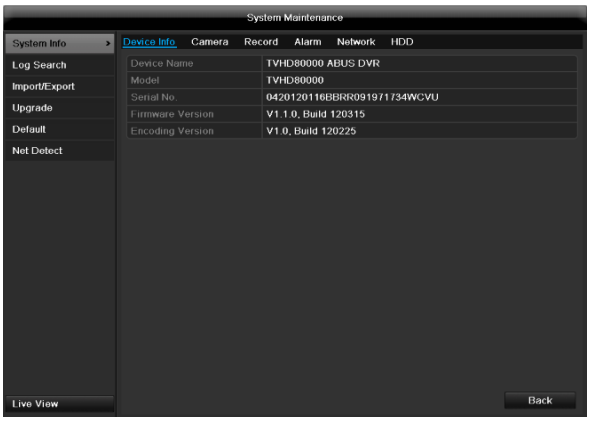

Menu	Setting	P.
System Info	Device information (serial number, firmware status etc.)	117
Log Search	A search of recordings or information (S.M.A.R.T. HDD status) can be made in the log file according to certain criteria (alarms, exceptions, operation or information).	117
Import/Export	Used to export or import the settings	118
Upgrade	Carries out a firmware upgrade	118
Default	System reset	119
Network	Displays the transmission and reception rate of the recorder	119

System Info

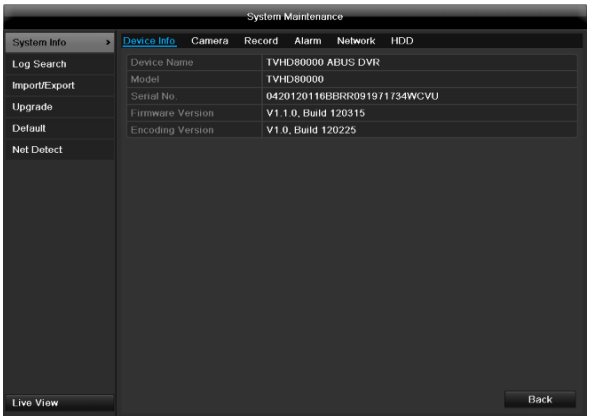

Note

The information menu shows the technical data for the device and information on the various settings of the cameras, recording etc.

This can be useful for support queries, for example.

Log Search

Note

An event search can be made according to the following main types, events and parameters:

- All
- Alarm
- Exception
- Operation
- Information

Filter1	Filter2
All	-
Alarm	• All • Alarm Input / Output • Start / Stop Motion Detection • Start / Stop Tamper-proof
Exception	• All • Video Loss Signal • Video Signal Exception • Illegal Login • HDD Full • HDD Error • IP Conflicted • Network Disconnected • Record / Capture Exception • Input / recording resolution mismatch
Operation	• All

	• Power On • Abnormal Shutdown • Start / Stop Audio • Local Operation, e.g.: Shutdown / Reboot / Login / Logout / Configure Parameters / Upgrade / Start Recording • Remote Operation, e.g.: Export Record File / Alarm Arming / ...
Information	• All • Local HDD Information • HDD S.M.A.R.T. • Start / Stop Recording • Start / Stop Capture • Delete Expired Record • NetHDD Information

1. Select the event you wish to search for in the log, then select the sub-parameter.
2. Enter the date and time under “Start Time” and “End Time”, then click on **Search**.
3. The results are then displayed:

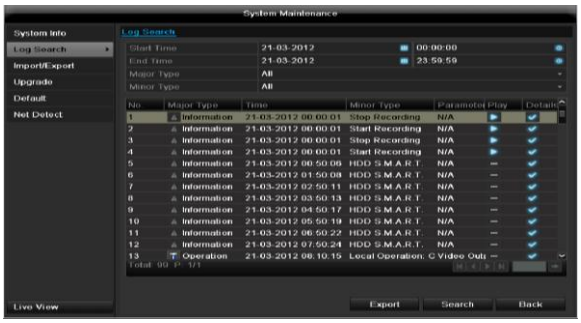

- The pages are changed using the navigation bar:

(1) (2) (3) (4) (5) (6)

Note

To scroll forwards or backwards press (3) or (2).
To jump to the first or last page press (4) or (1).
To go to a specific page number enter it in (5) and confirm by clicking (6).

- Click on **Details** to see more detailed information.
- Click on **Play** to start the recording for the event, when necessary.
- Click on **Export** to back up the log file on a USB medium.

Import / Export

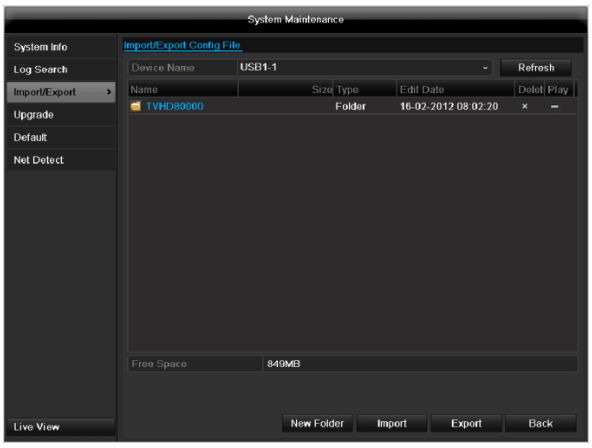

Note

The configuration data contains all settings made on the device since the start of operation. This data can be saved on a USB medium. You can then configure another device identically, for example.

Upgrade

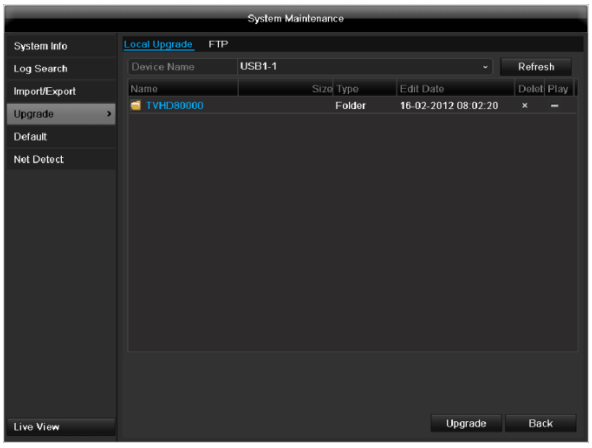

Note

A device upgrade can be made from a USB device or over the network via FTP.

- Copy the upgrade file to the main directory of a USB stick.
- Connect the USB stick to a USB port on the device.

1. Select the USB port (click on **Refresh**, if necessary).
2. Select the upgrade file and click on **Upgrade**.
3. Wait until the device reboots.
4. Check the firmware status in the “Maintenance” menu under “System Info”.

Default

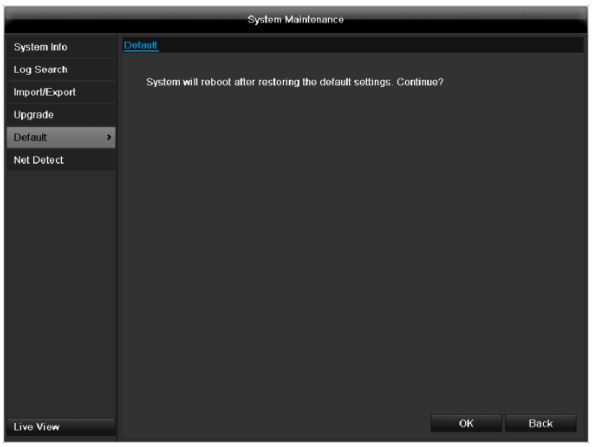

Note

In this process, the device is reset to the factory default settings.

Warning

All settings made since the start of operation are deleted (cameras, recording settings, PTZ, alarms etc.)!

Avoid data loss by backing up the settings in advance. These can be imported again following the system reset.

Network

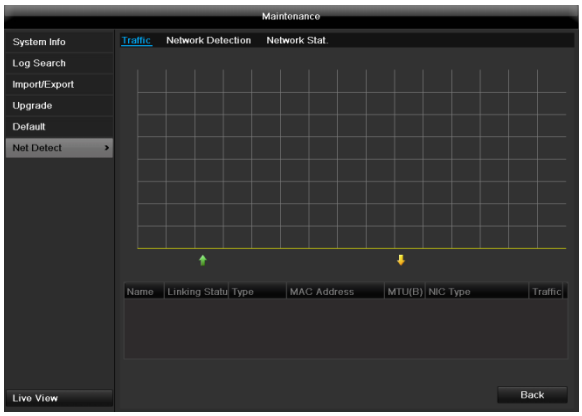

Note

Information regarding the network traffic and network interfaces are shown here.

TAB network load

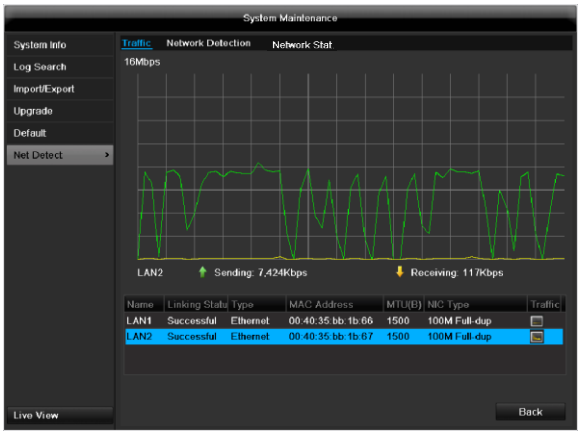

The amount of received and sent data is displayed graphically.
Depending on the network settings, the status and information for one or two network connections is shown in the field underneath the graph.

TAB Network Detection

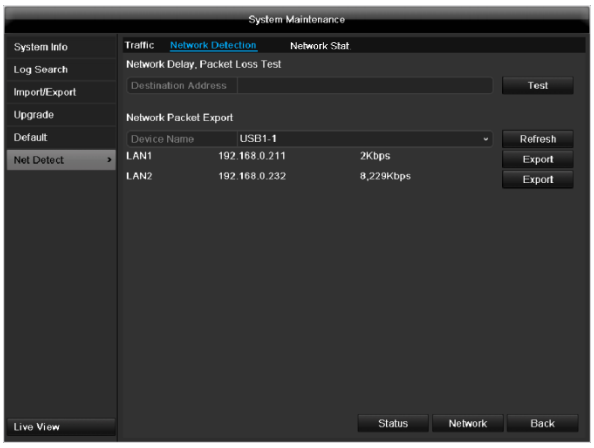

In “Destination Address”, you can check the connection to another device, such as a computer (‘pinging’). Enter the network address of the device to be checked (e.g. 192.168.0.25) and press **Test**.

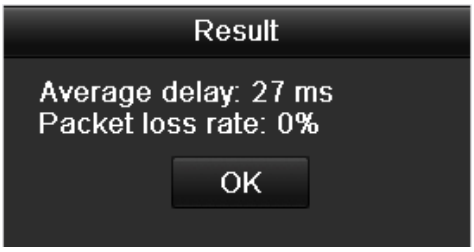

Information on two parameters appears:

Parameter	Setting
Average delay	The time the pinged device needs to reply.
Packet loss Rate:	Displays the percentage of packets that were not transmitted

Note
If the packet loss rate is high, we recommend that the “Network Test” is repeated.

Note
If the packet loss rate is still high, you should check that the cables are correct and not damaged.
The higher the packet loss rate, the poorer the connection between the pinged device and recorder.

For “Network Packet Export”, you can export the settings of the individual connections or – depending on the setting – the connection.

3. For “Device Name”, select a storage medium to save the settings to.
4. Click **Export**.

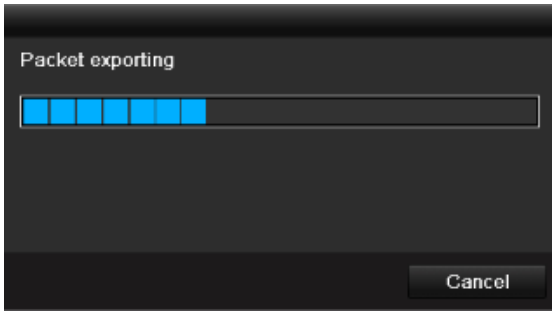

After the progress display finishes and initialization is successful, an information window appears. Close it with **OK**.

- Click **Status** to display the status of the LAN connections (connected/not connected).
- Click **Network** to change your network settings (see p. 96).

TAB Network Stat.

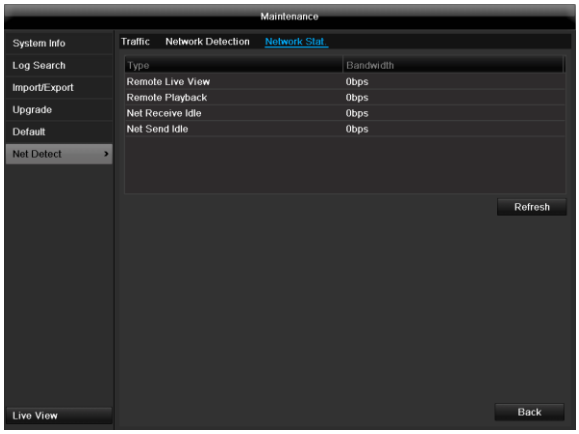

Displays all used in- and outcoming bandwidth.

Video Export

Duration

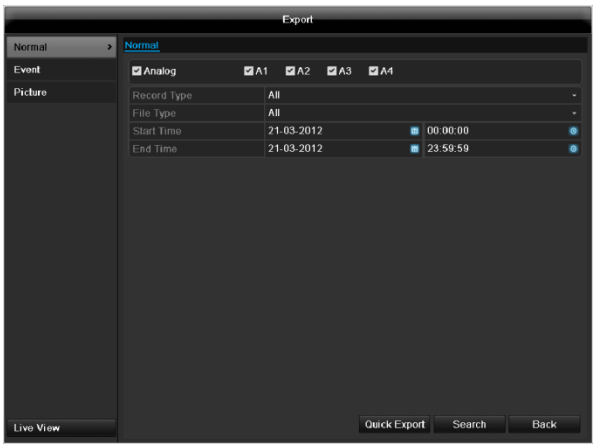

Note

The export function is used to store important recordings on connected external media, such as:

- USB media
- USB HDD
- DVD writer

- When “Quick export” is selected, all recordings of the selected time span are exported. Please note that not more than 24 hours can be exported.

1. Enter the parameters.
2. Click on “Details” to limit the search

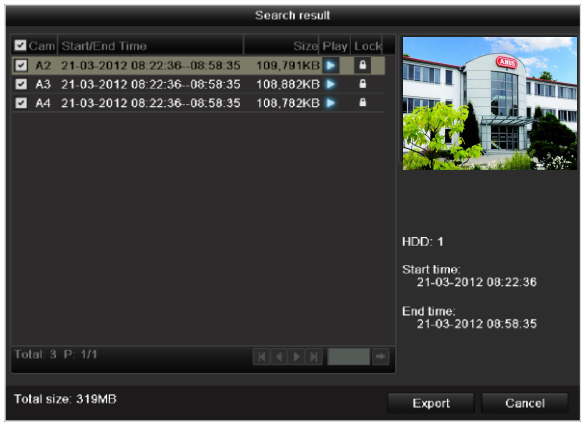

- The file size of the individual recording and the total size of all found recordings are displayed.
- By clicking the “Playback” symbol you can view the respective recording.
- To block or unblock a file click on the “Lock” symbol.

3. Click on **Export** to access the export screen.

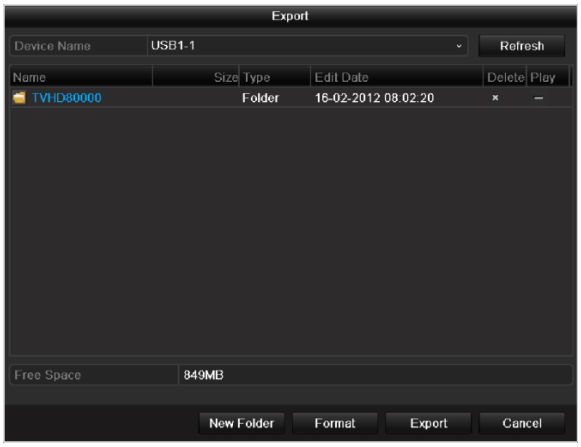

1. Select the connected medium used for data storage from the drop-down menu.
2. If the medium is not displayed, click on **Refresh**.

- If the medium is still not displayed, disconnect it from the device and reconnect the medium again. See also the manufacturer’s specifications.

3. Click on **Export** to start the export process. The progress of the export process is then displayed.

Note

After the storage process is completed, the data on the medium can be selected and played on the player (which was also backed up). In this way, you can check whether the export has been made successfully.

Event (event type ‘Alarm input’)

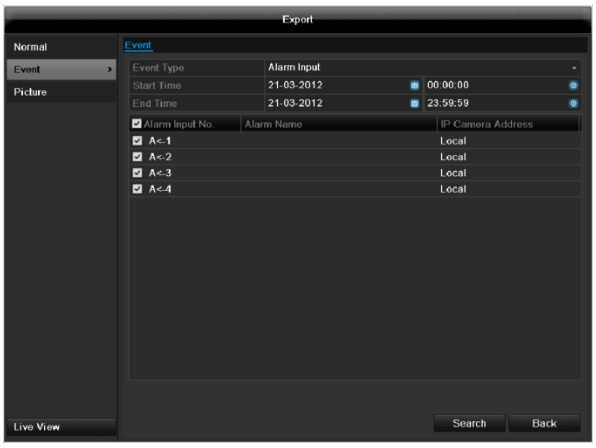

Define the time span of the recording being searched for by means of the selection fields at “Start time” and “End time”. Select the alarm input by activating or deactivating the check box and click **Search**.

Event (event type ‘Motion’)

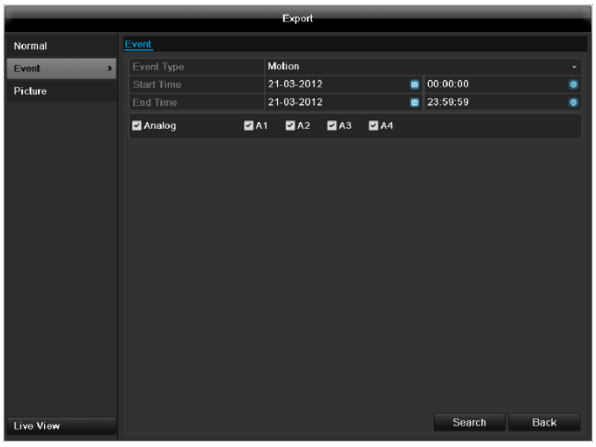

Define the time span of the recording being searched for by means of the selection fields at “Start time” and “End time”. Select the camera by activating or deactivating the check box and click **Search**.

For both types of event, the following window appears after activating the **Search** button:

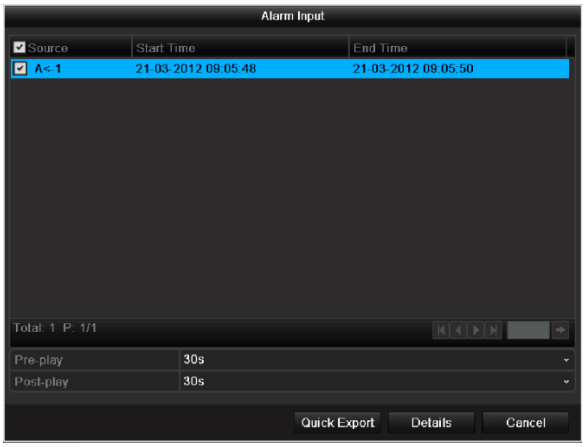

Select the files to be exported by activating or deactivating the check box. You can set the pre-alarm and post-alarm time at “Pre-play” or “Post-play”. In this way you can define the length of your export video.
Click on **Details** to view the selected video. For more exact information on the Details window, see **DURATION** (p. 121).

Note
The “Pre-play” recordings can only be viewed when recording has been carried out before the alarm.

Note
The sub-menus “Normal” and “Picture” are similar and are therefore not listed separately.

Manual Management

Press the REC button or go to panic recording in the main menu in order to start a manual image / video recording or to switch to an alarm output.

Record

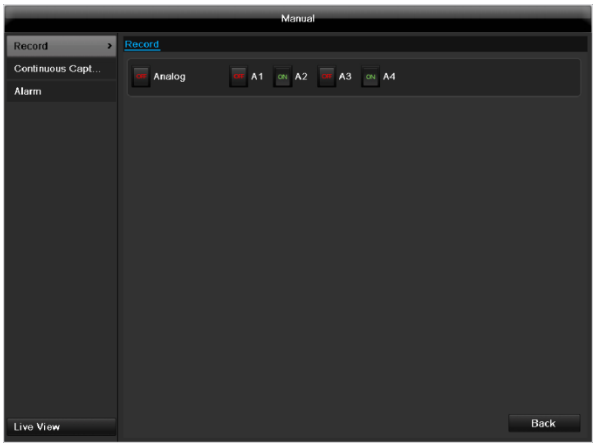

Select the camera to start manual recording by clicking the corresponding button.

Note

Click “Analog” to record all connected cameras.

Continous Capture

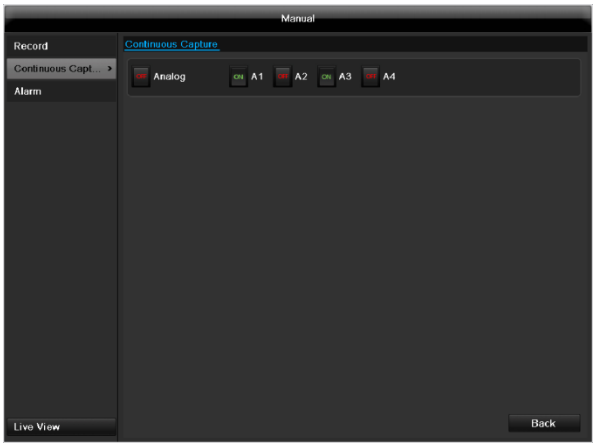

Select the camera to manually record continuous instant images. You can set the time interval in which these are recorded in the recording menu (see p. 109).
Click the control button for this.

Alarm

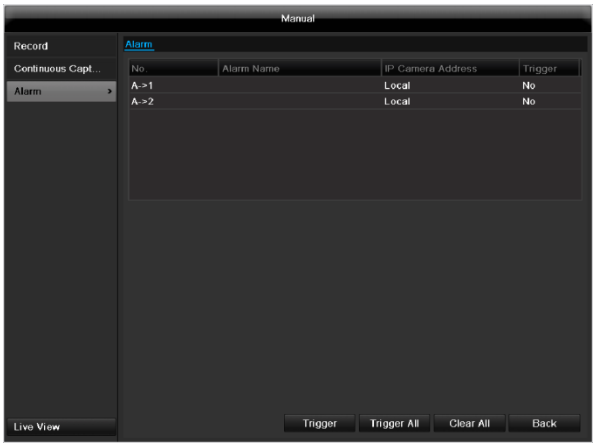

In order to switch on one of the alarm outputs, select the alarm output with a left click and click on **Trigger** for one, or **Trigger All**, to switch on all outputs. To reset the output(s) again, click on **Clear** or **Clear all.**

Shutdown

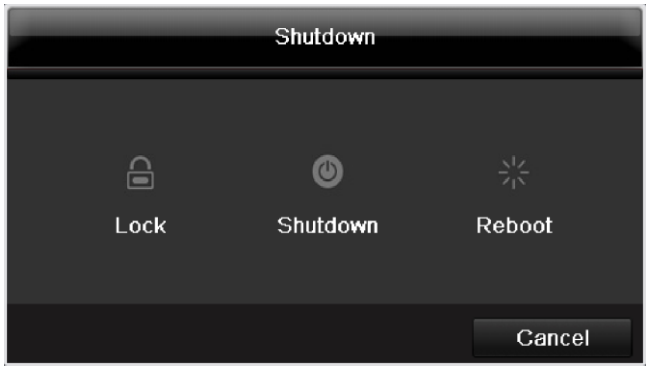

Note

- Select “Lock” to lock the operating menu.
- Select “ShutDown” to switch off the device.
- Select “Reboot” to reboot the system (switch off and back on).

Troubleshooting

Before calling the Service department, read the following information to determine the possible cause of a malfunction.

Malfunction	Cause	Solution
No power	Mains cable not connected	Connect the mains cable securely to the socket
	Power switch set to OFF	Turn the power switch to ON
	No current in the power socket	Use another device on the socket, where necessary
No image	Screen not set for reception	Set the correct video input mode until an image from the recorder appears
	Video cable not connected properly	Connect the video cable securely
	Connected modem is switched off	Switch on the monitor
No sound	Audio cables not connected properly	Connect the audio cables securely
	Devices connected over the audio cables are not switched on	Switch on the devices connected over the audio cables
	Audio connection cable is damaged	Replace the cable
HDD is not working	Connection cables not connected properly	Connect the cables securely
	HDD defective or not system-compatible	Replace with a recommended HDD
USB port not working	Device not supported	Connect a compatible USB medium (USB 2.0)
	USB hub is in use	Connect the USB medium directly
Network access not possible	Network cable connections are loose	Connect the network cable
	Network settings are incorrect (DHCP, IP address etc.)	Check the network configuration and correct it, ifnecessary (see page 96).
Remote control is not working	Batteries inserted with the wrong polarity or are empty	Replace the batteries. To control the device with the remote control, point it at the remote control sensor on the device
	Remote control too far away from the recorder	Use the remote controller within 7 metres from the device
	Signal blocked by obstruction between the remote control and recorder	Remove the obstruction
	Lighting too bright or fluorescent tubes in use?	Switch off strong fluorescent lighting in the immediate vicinity
Recording not possible	No HDD or HDD is not initialised	Install and initialise the HDD
Sudden deactivation of the device	Temperature inside the device is too high	Clean the device and remove any obstructions from the ventilation area

Device cleaning and care

Note

- Your device requires no maintenance.
- Protect the device from dust, dirt and moisture.

Technical data

Subject is to alterations and errors. The dimensions are approximate values.

ABUS digital recorder	TVVR60011	TVVR60021
Video compression	H.264	
Hybrid-enabled	Yes	
Camera inputs (analog)	8	16
Camera inputs (IP)	8	16
Camera outputs	8 (analog, 1.0 V s-s, 75 Ω)	16 (analog, 1.0 V s-s, 75 Ω)
Monitor outputs	Monitor: 1 x BNC (1.0 V p-p, 75 Ω), 1 x VGA, 1 x HDMI, 4 x BNC Spot (1.0 V p-p, 75 Ω)	
Operating mode	Triplex	
Resolution (live view)	HDMI/VGA: 1920×1080/60 Hz (1080 p),1600×1200/60 Hz, 1280×1024/60 Hz, 1280×720/60 Hz, 1024×768/60 Hz	
Resolution @ frame rate per camera (recording)	Max. 1920 x 1080 p at @ 25 fps	
Total frame rate	400 fps	800 fps
Network bandwidth (uploading)	240	240
Network bandwidth (downloading)	40	80
Compression levels	Network camera-dependent	
Storage medium	8 x SATA HDD	8 x SATA HDD
Data backup	3 x USB 2.0, eSATA	3 x USB 2.0, eSATA
Views	1/4/6/8/9	1/4/6/8/9/16
Recording modes	Manual, schedule, motion detection, alarm, motion detection and alarm, motion detection or alarm	
Search modes	By event, date & time	
Alarm inputs (NO/NC)	8	16
Relay outputs	2 (maximum load: 12 V DC/1 A)	4 (maximum load: 12 V DC/1 A)
User levels	2 (max. 31 users)	
Network access	1 x RJ45 10/100/1,000 Mbps	
Parallel network access	128 camera connections	
Network functions	Live view, playback, data export, settings	
DDNS	√	
NTP	√	
PTZ control	RS-485	
PTZ protocols	PELCO-D	
Alarms	Acoustic warning, OSD signal, e-mail, CMS	
Audio	Line in: 1 x RCA (2.0 V s-s, 1 kΩ), Audio in 1–4: RCA (2.0 V s-s, 1 kΩ), Audio in 5–8: DB26 (2.0 V s-s, 1 kΩ), Audio out: 2 x RCA (2.0 V s-s, 1 kΩ)	Line in: 1 x RCA (2.0 V s-s, 1 kΩ), Audio in 1–4: RCA (2.0 V s-s, 1 kΩ), Audio in 5–16: DB26 (2.0 V s-s, 1 kΩ), Audio out: 2 x RCA (2.0 V s-s, 1 kΩ)
Control	USB mouse, remote control (not included in scope of delivery)	
Software	ABUS CMS software	
OSD languages	English, German, French, Dutch, Danish, Italian, Polish, Czech, Spanish	
Power supply	100~240 V AC, 6.3 A, 50~60 Hz	100~240 V AC, 6.3 A, 50~60 Hz
Power consumption	< 40 W (without HDD)	< 45 W (without HDD)
Operating temperature	-10 °C ~ +55 °C	
Dimensions (W x H x D)	470 x 90 x 445 mm	
Weight	≤ 8 kg (without HDD)	
Certifications	CE	

Disposal

Information on the EU directive on waste electrical and electronic equipment

To protect the environment, do not dispose of the device with domestic waste at the end of its service life. It can be disposed of at one of the appropriate collection points in your country. Please obey your local regulations when disposing of material.



Dispose of the device in accordance with EU directive 2002/96/EC – WEEE (Waste Electrical and Electronic Equipment). If you have any questions, please contact the department of your local authority which is responsible for waste disposal. Used equipment can be disposed of, for example, by your local or municipal authority, the local waste disposal company or your dealer.

Information on handling batteries

- Always insert batteries with the correct polarity. Never attempt to recharge the batteries supplied and do not throw them into naked flames under any circumstances. Do not use different batteries at the same time (old and new, alkaline and zinc-carbon etc.). Remove the batteries if the device is not used for a long period of time. If used improperly, there is a risk of explosion and leaking batteries!
- Take environmental protection into account – used batteries should not be disposed of in domestic waste! They must be taken to a collection point for used batteries.
- Make sure that batteries are kept away from small children. Children may put batteries in their mouths and swallow them. This can cause serious harm to their health. If this happens, consult a doctor immediately.
- Do not charge normal batteries, heat them up or throw them into naked flames (they may explode).
- Change low batteries in good time.
- Always change all the batteries at the same time and use batteries of the same type.

Important

Leaky or damaged batteries can cause chemical burns on contact with the skin.

- In this case, wear protective gloves.
- Clean the battery compartment with a dry cloth.

Important information on disposing of batteries

Your product uses batteries which are subject to the European directive 2006/66/EC and may not be disposed of with domestic waste.

Find out about the regulations for the separate collection of batteries which apply in your country.

Proper disposal of batteries helps prevent harm to health and the environment.

Batteries that contain harmful chemicals are labelled with these signs:

Pb = battery contains lead

Cd = battery contains cadmium

Hg = battery contains mercury

Information on the European RoHS directive

The device complies with the RoHS directive.

Compliance with the RoHS directive means that the product or component does not contain more than the following maximum concentrations of the following substances in homogeneous materials, unless the substance is part of an application that is excluded from the RoHS directive:

a) 0.1% lead (by weight)

b) Mercury

c) Hexavalent chromium

d) Polybrominated biphenyl (PBB) and polybrominated diphenyl ether

e) 0.01% cadmium (by weight)

Glossary

Overview of specialist terms

1080i

HDTV image signal with 1080 pixels and interlaced display.

16:9

Cinematographic aspect ratio on widescreen displays.

720p

HDTV image signal with 1280 x 720 pixels and progressive display.

CIF

Common Intermediate Format

Originally planned for converting PAL to the NTSC standard. CIF corresponds to a video resolution of 352 x 288 pixels (2CIF = 704 x 288 pixels; 4CIF = 704 x 576 pixels).

CINCH

Socket type used for analogue audio or CVBS video signals.

CVBS

Colour, Video, Blank and Sync – The simplest variation of video signals (also known as composite video). The image quality is comparatively low.

DDNS

Dynamic Domain Name System entry

Network service which provides and updates IP addresses of its clients in a database.

DHCP

Dynamic Host Configuration Protocol

Network protocol which allows the automatic connection of devices (clients) in existing networks. DHCP servers (e.g. Internet routers) automatically assign the IP address, network mask, gateway, DNS server and WINS server (when required). Only the automatic acquisition of IP addresses must be activated for the client in this case.

Domain

Name used for the identification of websites on the Internet (e.g. www.abus-sc.de).

Dual Stream

Dual stream is a video transmission method. A high-resolution recording and lower-resolution transmission are made over the network, for example. The main stream has a 4CIF resolution and the sub-stream has a CIF resolution.

DVR

Digital Video Recorder – A device used for recording different video and audio sources (analogue, digital). The data is compressed for recording and saved on hard disk drives (HDD).

H.264

(MPEG-4 AVC) – Standard method for the highly-efficient compression of video signals. Used on Blu-ray discs or video conference systems, for example.

HDD

Hard Disk Drive

Digital data storage on computers or DVRs.

GIGABYTE

Unit of capacity for storage media (HDD, USB, SD/MMC cards).

HDVR

Hybrid DVR – DVR used for recording analogue cameras and network cameras.

http

Hypertext Transfer Protocol

Method for transmitting data across networks. Primarily used for displaying websites in a browser.

INTERLACED

Method for improving the picture quality of a video signal without consuming extra bandwidth (scan pattern on every second line).

IP address

An address in the computer network based on the Internet protocol. Allows different devices to identify themselves in a network so that they are accessed specifically.

JPEG

Compression method for photo images with minimal loss. Most digital cameras save photos in JPEG format.

MPEG

Moving Picture Experts Group – International standard for the compression of moving images. On some DVDs, the digital audio signals are compressed and recorded in this format.

NTP

Network Time Protocol

Method for synchronising the time across networks. SNTP (Simple Network Time Protocol) is also available, offering a simplified protocol.

NTSC

Standard television format in the USA. The method is different from the European PAL system in certain ways. A full-screen NTSC image is comprised of 480 visible lines and a total of 525 lines. 60 half-images are displayed per second. Compared to PAL, the system is more susceptible to colour errors.

PAL

Phase Alternating Line – European colour TV system. Uses 576 visible image lines. Together with the lines used for signal management, a full-screen image is comprised of 625 lines. 50 half-images are displayed per second. The phase position of the colour signal changes from line to line in the image.

PANEL

Interior of a flatscreen display (e.g. LCD or plasma panels).

PC

Personal Computer – Can be used as a remote site, either with the software supplied or over a browser.

Pixel

Short for “picture element”, the smallest unit for digital image transmission or display.

PIP

Picture in Picture – Where two signal sources are shown on the screen at the same time. The second signal source is stored above the first.

PPPoE

PPP over Ethernet (point-to-point protocol)

Network transmission method used for establishing a connection over dial-up lines. Used in ADSL connections, for example).

PROGRESSIVE

Method for displaying, storing or transmitting moving images in which all the lines of each frame are drawn in sequence. This is in contrast to the interlacing used in traditional television systems.

PTZ

Pan-Tilt-Zoom

Pan, tilt and zoom function on motor-driven cameras.

RESOLUTION

Normal PAL television systems show images in 576 lines, normally with 768 pixels. HDTV works with at least 1280 x 720 pixels.

SCREEN SIZE

Size of the display from the bottom-left corner to the top-right corner in inches or centimetres.

Browser

Program for viewing websites on the Internet.

USB

Universal Serial Bus

Serial bus connection, used for connecting media whilst in operation. Maximum data rate for USB 2.0: ca. 320 Mbit/s (ca. 40 MB/s).

VGA

Video Graphics Array – Standard interface for analogue video signals in PCs (primarily deals with RGB signals).

ZOLL (inches)

Typical unit of screen size. One inch is equivalent to 2.54 centimetres. The most common sizes of 16:9 displays are 26 inch (66 cm), 32 inch (81 cm), 37 inch (94 cm), 42 inch (106 cm), 50 inch (127 cm) and 65 inch (165 cm).

Internal HDD

The internal hard disk drive (HDD) is very sensitive. Operate the device according to the following instructions in order to avoid drive errors. Important recordings should be backed up on external media to avoid unexpected data loss.

Note

- Do not move the device during operation.
- Moisture inside the device can condense and lead to HDD malfunctions.
- When the device is turned on, never remove the mains plug from the socket or interrupt the power supply using the safety switch.
- Do not move the device immediately after switching it off. To move the device, carry out the following steps:
  1. Wait until OFF has been shown on the display for at least two minutes.
  2. Remove the mains plug from the socket.
  3. Move the device.
- Data on the HDD can be lost in the event of a power failure during operation. Use an uninterruptible power supply (UPS)!
- The HDD is very sensitive. Improper use or unsuitable surroundings can damage the HDD after some years of use. This may be indicated by the playback stopping unexpectedly or visible “mosaic” effects in the image. In some circumstances, there are no prior signs of a HDD malfunction.
- In the event of a malfunction, no recordings can be played. The HDD must be replaced in this case.